



www.chinagardentec.com



CONTENTS

Introduce-----	03/10
BCN series brush cutters-----	11/21
BG series knapsack Brush cutters -----	22/24
BC series brush cutters-----	25/42
Rice cutters-----	43/44
Chainsaws-----	45/48
Sprayers-----	49/50
Hedge trimmers-----	51/52
4 in 1 multifunctional machines-----	52
Augers-----	53
Blowers-----	54/55
Water pumps-----	56/60
UAV-----	63/66



Equipment:

Among the range of activities are precision die-casting and gear production, CNC machining, Plastic-making, product assembly, finishing and testing. The company has established also a dedicated research and development centre for its engines, motorcycles and outdoor power products, all of which are manufactured inside of this company.

All parts are checked by instrument at the rate 15%, only 100% quality is confirmed, the parts are allowed to production line, for key parts such as carburetors, coils, starters, crankshafts, cylinders and piston, gear and shaft, all of them are checked not only size, and relevant dimensions but also its material and checkial element and hardness with long time testing. coils and sparks are testing by working on testing equipment.

In order to be more easily to be efficient to control quality, for the key parts such as cylinders, starters and crankshafts and plastic parts are produced inside of factory, the die-casting proceeding can keep quality durable. Each part are produced by special macines and special workers, the machining and tooling is most important for the function and quality, so all the workers are well skilled for its position.





2 professional production for gasoline engine, all the engine is under monitoring of the quality-controller team



The inner rubber bearing is poured automatically into pipe by machines to be sure of its same diment and centre



The machine is tested by the computer 100%



Package is done automatically by machines



Gardentec has built the complete production lines of chain saws, based on its advanced technical and equipments and continous improving production process,supplied high quality products to all users.




Logistics managed by ERP system

Gardentec has established the whole logistics contact with the market, it integrates variousmarketing, service and uniform management as one whole, and carries out a complete set of ERP management system and technical measure.



ISO9001:2000 CERTIFICATE

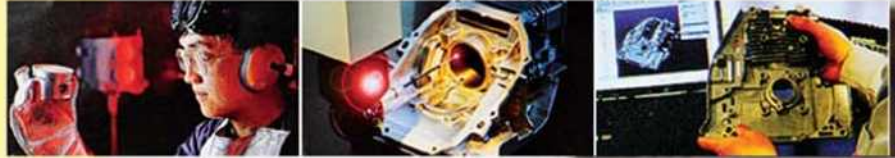



Gardentec is setting the product innovation strategy and driving it at enterprise level to develop the world class product and to improve the customer satisfaction and quality competition.

Our quality control department consists of IQC, QC and QA three sub-departments, which control products quality in different process relatively. From material in-storage to semi-finished products to finished products,

Our QA engineers strictly control and guarantee products quality delivered to customers.

We satisfy customers by providing high-quality product.

What are we?

Jinhua Gardentec Co.,Ltd,whose owner is from a company which he worked for 14 years since 2001, with sales manager for all products of innovation, was established when he felt very fresh after getting out of the gate of Primer Company

Now because of the global economic situation and market demand, the orders are smaller and smaller and many small customers hope to get small quantity of products, what's more, one order is broken into pieces of various kinds of products, therefore it is very difficult for big company to deal with the small orders, even more, now the online sales become more and more popular with the world because the wireless and mobile phone is over to all peoples, it is time to open a company to deal with them

What do we do?

This company name meaning is that, we provide good solution and high technique for your living environment and to protect our global earth. he has the following idea:

- 1)We have flexible production line for small ,big quantity order.
- 2)We accept all quantity of your order or new production of innovation and development of OEM products,we can produce for customers with OEM brands,especially we have the capacity to develop new products in short time.
- 3)We can help you to control your goods inspection of testing report and provide all really truth report for your order from factory and send them to you first time , only after you check your goods by your eyes, the goods can be released to load and ship.

What we can do?

Care for environment and health

New innovative technology for Our Environmentally and comfort of human

Gardentec branded outdoor power equipment are devoted himself to developing the environmentally adopted products to protect our environment and make work more easier and comfortable, Enjoy our working and enjoy our life. Because of this idea, We have developed STRATIFIED CHARGE system to make emission clean and the fuel and cost more economical ,

The engine with Stratified charge system featured as following:

The emissions is enough clean to meet regulations without heated, heavy catalytic converter

Not necessary for valve adjustments, oil changes or daily oil reservoir level checks

More stronger power than same size of 4 stroke gasoline engine

Operating principle of the Stratified charge design

Top dead center



As the piston proceeds through the upstroke of the intake stroke, the crankcase vacuum sucks the lead air in through the scavenging port via the groove on the piston skirt

Bottom dead center



All the piston begins its down stroke after top dead center, a scavenging port starts to open and lead air in the scavenging port moves into the cylinder earlier than the air-fuel mixture


Scavenging port closes




As the piston begins its upstroke after bottom dead center, burnt gas in the cylinder is pushed out through the exhaust port by lead air. Therefore, almost no air-fuel mixture is emitted

CWI TECHNOLOGY

Now, under the cooperation of Germany experts, we are developing CWI TECHNOLOGY for all gasoline engine powered machines, The CWI technology provides a lot of advantages for clean emission clean and more economical fuel and cost.

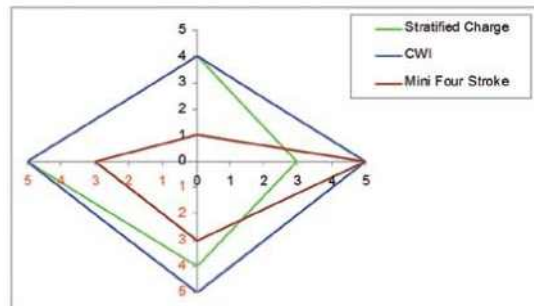

INTAKE AND COMPRESSION
Only air is drawn into crankcase




COMBUSTION
Crankcase is filled with air while injection tube draws fuel


























EXHAUST AND INDUCTION
Only air is forced through transfer ports into combustion chamber



INJECTION
Fuel injection starts. Only air escapes through exhaust port



BCN Series General Information

Model Number	Goods Number	Displacement	Power	Shaft	Handle	Working ahead		Marks
						Small Nylon cutter	Big Nylon cutter	
BCN260	 BCN260B	25.4cc	0.7kw/7000R/Min	Complete curve	Loop handle "D"	Small Nylon cutter		Single shoulder strap
	 BC260BS	25.4cc	0.7kw/7000R/Min	2 splittable parts curve	Loop handle "D"	Small Nylon cutter		
	 BCN260	25.4cc	0.7kw/7000R/Min	complete whole	Double "U"	Big Nylon cutter	Metal blade	
	 BCN260S	25.4cc	0.7kw/7000R/Min	2 splittable shafts	Double "U"	Big Nylon cutter	Metal blade	
	 BCN260D	25.4cc	0.7kw/7000R/Min	complete whole	Loop handle "P"	Big Nylon cutter	Metal blade	
	 BCN260DS	25.4cc	0.7kw/7000R/Min	2 splittable shafts	Loop handle "P"	Big Nylon cutter	Metal blade	
	 BCN305	32.5cc	0.9kw/7000R/Min	complete whole	Double "U"	Big Nylon cutter	Metal blade	
	 BCN305S	32.5cc	0.9kw/7000R/Min	2 splittable shaft	European style "U"	Big Nylon cutter	Metal blade	
	 BCN305EU	32.5cc	0.9kw/7000R/Min	complete whole	Super antivibration "W" handle	Big Nylon cutter	Metal blade	
	 BCN305F	32.5cc	0.9kw/7000R/Min	complete whole	Double "U"	Big Nylon cutter	Metal blade	
BCN415	 BCN305D	32.5cc	0.9kw/7000R/Min	complete whole	"P" loop grip handle	Big Nylon cutter	Metal blade	SuperAnti-Vibration clutch connectors
	 BCN305DS	32.5cc	0.9kw/7000R/Min	2 splittable shaft	"P" loop grip handle	Big Nylon cutter	Metal blade	
	 BCN415	42.7cc	1.4kw/6500R/Min	Complete	Super antivibration "W" handle	Big Nylon cutter	Metal blade	
	 BCN415F	42.7cc	1.4kw/6500R/Min	complete whole	Double "U"	Big Nylon cutter	Metal blade	
	 BCN415EU	42.7cc	1.4kw/6500R/Min	complete whole	Super antivibration "W" handle	Big Nylon cutter	Metal blade	
	 BCN415S	42.7cc	1.4kw/6500R/Min	2 splittable shaft	Double "U"	Big Nylon cutter	Metal blade	
	 BCN520	51.7cc	1.7kw/6500R/Min	complete whole	Double "U"	Big Nylon cutter	Metal blade	
	 BCN415F	51.7cc	1.7kw/6500R/Min	complete whole	Double "U"	Big Nylon cutter	Metal blade	
	 BCN520EU	51.7cc	1.7kw/6500R/Min	complete whole	Super antivibration "W" handle	Big Nylon cutter	Metal blade	
	 BCN520S	51.7cc	1.7kw/6500R/Min	2 splittable parts	European style "U"	Big Nylon cutter	Metal blade	
BCN520	 BCN520	51.7cc	1.7kw/6500R/Min	complete whole	Super antivibration "W" handle	Big Nylon cutter	Metal blade	Vibration clutch connectors
	 BCN520EU	51.7cc	1.7kw/6500R/Min	complete whole	Super antivibration "W" handle	Big Nylon cutter	Metal blade	
	 BCN520S	51.7cc	1.7kw/6500R/Min	2 splittable parts	European style "U"	Big Nylon cutter	Metal blade	
	BCN520	51.7cc	1.7kw/6500R/Min	complete whole	Super antivibration "W" handle	Big Nylon cutter	Metal blade	
	BCN520EU	51.7cc	1.7kw/6500R/Min	complete whole	Super antivibration "W" handle	Big Nylon cutter	Metal blade	
	BCN520S	51.7cc	1.7kw/6500R/Min	2 splittable parts	European style "U"	Big Nylon cutter	Metal blade	
	BCN520	51.7cc	1.7kw/6500R/Min	complete whole	Super antivibration "W" handle	Big Nylon cutter	Metal blade	
	BCN520EU	51.7cc	1.7kw/6500R/Min	complete whole	Super antivibration "W" handle	Big Nylon cutter	Metal blade	
	BCN520S	51.7cc	1.7kw/6500R/Min	2 splittable parts	European style "U"	Big Nylon cutter	Metal blade	
	BCN520	51.7cc	1.7kw/6500R/Min	complete whole	Super antivibration "W" handle	Big Nylon cutter	Metal blade	



BCN260

Pipe type: one whole straight shaft
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 24
 Handle: Double (Dual)handles
 Belt: Single
 Weight(kg): 4.8
 Pipe length(mm): 1500
 Cutting head: Small black nylon cutter
 Matched engine: IE34FA
 Displacement(cc) : 25.4
 Standard power: 0.7Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.7
 Certificate: CE/EURO II

Feature

- ▶ Light weight ,well balanced trimmer.
- ▶ Ideal for thinning along walls or fences, under hedges or along borders.
- ▶ Reliable trimmer for home users.



BCN260S

Pipe type: 2-split parts, straight shaft
 Type of shaft :Solid
 Diameter of inner shaft: 8mm
 Diameter of Aluminium(mm): 24
 Handle: Double (Dual)handles
 Belt: Single
 Weight(kg): 4.8
 Pipe length(mm): 1500
 Cutting head: Small black nylon cutter,metal blade
 Matched engine: IE34FA
 Displacement(cc) : 25.4
 Standard power: 0.7Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.7
 Certificate: CE/EURO II

Feature

- ▶ Light weight ,well balanced trimmer.
- ▶ Ideal for thinning along walls or fences, under hedges or along borders.
- ▶ Reliable trimmer for home users.
- ▶ The quick-release coupling enables the shaft to be separated into two easily transportable and storable parts and to be subsequently reassembled no tools required.





BCN260B

Feature

- ▶ Light weight ,well balanced trimmer.
- ▶ Ideal for thinning along walls or fences, under hedges or along borders.
- ▶ Reliable trimmer for home users.
- ▶ The brushcutter with curved shaft is the ideal tool for trimming in restricted spaces.

Pipe type: one whole curve shaft
 Type of shaft :flexible
 Diameter of inner shaft: 8mm
 Diameter of Aluminium(mm): 24
 Grip Handle: D-type or b type
 Belt: Single
 Weight(kg): 3.8
 Pipe length(mm): 1500
 Cutting head: Small black nylon cutter
 Matched engine: IE34FA
 Displacment(cc) : 25.4
 Standard power: 0.7Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.7
 Certificate: CE/EURO II
 Package size: (24+12)x26x164x1/2
 Quantity in container
 20'FCL : 340 sets
 650 sets
 40'HQ: 860 sets



BCN260BS

Pipe type: 2-split parts ,curve shaft
 Type of shaft :Solid +flexible
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 24
 Grip Handle: D-type or b type
 Belt: Single
 Weight(kg): 3.9
 Pipe length(mm): 1500
 Cutting head: Small black nylon cutter
 Matched engine: IE34FA
 Displacment(cc) : 25.4
 Standard power: 0.7Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.7
 Certificate: CE/EURO II

Feature

- ▶ Light weight ,well balanced trimmer.
- ▶ Ideal for thinning along walls or fences, under hedges or along borders.
- ▶ Reliable trimmer for home users.
- ▶ The quick-release coupling enables the shaft to be separated into two easily transportable and storable parts and to be subsequently reassembled no tools required.
- ▶ The brushcutter with curved shaft is the ideal tool for trimming in restricted spaces.





BCN260D

Pipe type: one whole straight shaft
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 24
 Grip Handle: D-type or b type
 Belt: Single
 Weight(kg): 4.5
 Pipe length(mm): 1500
 Cutting head: Big Nylon cutter
 Matched engine: IE34FA
 Displacement(cc) : 25.4
 Standard power: 0.7Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.7
 Certificate: CE/EURO II

Feature

- ▶ Light weight ,well balanced trimmer.
- ▶ Ideal for thinning along walls or fences, under hedges or along borders.
- ▶ Reliable trimmer for home users.



BCN260DS

Pipe type: 2-split parts ,straight shaft
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 24
 Grip Handle: D-type or b type
 Belt: Single
 Weight(kg): 4.6
 Pipe length(mm): 1500
 Cutting head: Big Nylon cutter
 Matched engine: IE34F
 Displacement(cc) : 25.4
 Standard power: 0.7Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.7
 Certificate: CE/EURO II

Feature

- ▶ Light weight ,well balanced trimmer.
- ▶ Ideal for thinning along walls or fences, under hedges or along borders.
- ▶ Reliable trimmer for home users.
- ▶ The quick-release coupling enables the shaft to be separated into two easily transportable and storable parts and to be subsequently reassembled no tools required.





BCN305

Pipe type: one whole straight shaft
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 28
 Handle: Double (Dual)handles
 Belt: Single double shoulder strap
 Weight(kg): 7.6
 Pipe length(mm): 1500
 Cutting head: Big nylon cutter or metal blade
 Matched engine: IE36FA
 Displacement(cc) : 32.5
 Standard power: 0.8Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.84
 Certificate: CE/EURO II

Feature

- ▶ Light weight ,well balanced trimmer.
- ▶ Ideal for thinning along walls or fences, under hedges or along borders.
- ▶ Reliable trimmer for home users.



BCN305D

Pipe type: one whole straight shaft
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 28
 Grip Handle: D-type or b type
 Belt: Single double shoulder strap
 Weight(kg): 7.6
 Pipe length(mm): 1500
 Cutting head: Big nylon cutter or metal blade
 Matched engine: IE36FA
 Displacement(cc) : 32.5
 Standard power: 0.8Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.84
 Certificate: CE/EURO II





BCN305DS

Pipe type: 2 split parts, straight shaft
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 28
 Grip Handle: D-type or b type
 Belt: Single double shoulder strap
 Weight(kg): 7.6
 Pipe length(mm): 1500
 Cutting head: Big nylon cutter or metal blade
 Matched engine: IE36FA
 Displacement(cc) : 32.5
 Standard power: 0.8Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.84
 Certificate: CE/EURO II

Feature

- ▶ Light weight ,well balanced trimmer.
- ▶ Ideal for thinning along walls or fences, under hedges or along borders.
- ▶ Reliable trimmer for home users.
- ▶ The quick-release coupling enables the shaft to be separated into two easily transportable and storable parts and to be subsequently reassembled no tools required.



BCN305EU

Pipe type: one whole parts, straight shaft
 Clutch connectors :Super Anti-vibration system
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 28
 Grip Handle: D-type or b type
 Belt: Single double shoulder strap
 Weight(kg): 7.9
 Pipe length(mm): 1500
 Cutting head: Big nylon cutter or metal blade
 Matched engine: IE36FA
 Displacement(cc) : 32.5
 Standard power: 0.8Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.84
 Certificate: CE/EURO II

Feature

- ▶ Designed with reliable starting in mind, and thanks to durable engine and the simplified starting system this has been easily achieved. Powered by a low-emission. The 4 point antivibration system reduces user fatigue, ideal for contractors, landscapers and demanding property owners with large areas to maintain.
- ▶ Anti-vibration system
Effectively damps vibration from the engine and cutting tool. Vibration at the handles is significantly reduced.
- ▶ The ergonomic bike handle can be easily adjusted to suit the operator using the central wing screw no tools required. 90° rotation for easy transportation and space-saving storage.





BCN305F

Pipe type: one whole part, straight shaft
 Clutch connectors Anti-vibration system
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(MM): 28
 Grip Handle: D-type or b type
 Belt: Single double shoulder strap
 Weight(kg): 7.6
 Pipe length(mm): 1500
 Cutting head: Big nylon cutter or metal blade
 Matched engine: IE36FA
 Displacement(cc) : 32.5
 Standard power: 0.8Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.84
 Certificate: CE/EURO II

Feature

- ▶ **Anti-vibration system**
Effectively damps vibration from the engine and cutting tool. Vibration at the handles is significantly reduced.
- ▶ **The ergonomic bike handle can be easily adjusted to suit the operator using the central wing screw**



BCN305S

Pipe type: 2-split parts, straight shaft
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 28
 Handle: Double (Dual)handles
 Belt: Single double shoulder strap
 Weight(kg): 7.9
 Pipe length(mm): 1500
 Cutting head: Big nylon cutter or metal blade
 Matched engine: IE36FA
 Displacement(cc) : 32.5
 Standard power: 0.8Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.85
 Certificate: CE/EURO II

Feature

- ▶ **Light weight ,well balanced trimmer.**
- ▶ **Perfect for professional use**
- ▶ **The quick-release coupling enables the shaft to be separated into two easily transportable and storable parts and to be subsequently reassembled no tools required.**





BCN415

Pipe type: one whole straight shaft
 Type of shaft: Solid
 Diameter of inner shaft: 8mm
 Diameter of Aluminium(mm): 28
 Handle: Double (Dual) handles
 Belt: Single double shoulder strap
 Weight(kg): 7.8
 Pipe length(mm): 1500
 Cutting head: Big nylon cutter or metal blade
 Matched engine: IE40F-5A
 Displacement(cc) : 42.7
 Standard power: 1.4Kw/6500r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.9
 Certificate: CE/EURO II

Feature

- ▶ Light weight ,well balanced trimmer.
- ▶ Perfect for professional use
- ▶ The quick-release coupling enables the shaft to be separated into two easily transportable and storable parts and to be subsequently reassembled no tools required.




BCN415EU

Pipe type: one whole straight shaft
 Clutch connectors :Super Anti-vibration system
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 28
 Handle: Double (Dual) handles
 Belt: Single double shoulder strap
 Weight(kg): 7.8
 Pipe length: 1500
 Cutting head: Big nylon cutter or metal blade
 Matched engine: IE40F-5A
 Displacement(cc) : 42.7
 Standard power: 1.4Kw/6500r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.9
 Certificate: CE/EURO II

Feature

- ▶ Designed with reliable starting in mind, and thanks to durable engine and the simplified starting system this has been easily achieved. Powered by a low-emission. The 4 point antivibration system reduces user fatigue, ideal for contractors, landscapers and demanding property owners with large areas to maintain.
- ▶ Anti-vibration system
Effectively damps vibration from the engine and cutting tool. Vibration at the handles is significantly reduced.
- ▶ The ergonomic bike handle can be easily adjusted to suit the operator using the central wing screw no tools required. 90° rotation for easy transportation and space-saving storage.





BCN415F

Pipe type: one whole straight shaft
 Clutch connectors: Anti-vibration system
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 28
 Handle: Double (Dual)handles
 Belt: Single double shoulder strap
 Weight(kg): 7.8
 Pipe length(mm): 1500
 Cutting head: Big nylon cutter or metal blade
 Matched engine: IE40F-5A
 Displacement(cc) : 42.7
 Standard power: 1.4Kw/6500r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.9
 Certificate: CE/EURO II

Feature

- ▶ **Anti-vibration system**
Effectively damps vibration from the engine and cutting tool. Vibration at the handles is significantly reduced.
- ▶ The ergonomic bike handle can be easily adjusted to suit the operator using the central wing screw



BCN415S

Pipe type: 2-split parts, straight shaft
 Type of shaft :Solid
 Diameter of inner shaft: 8mm
 Diameter of Aluminium(mm): 28
 Handle: Double (Dual)handles
 Belt: Single double shoulder strap
 Weight(kg): 8.1
 Pipe length(mm): 1500
 Cutting head: Big nylon cutter or metal blade
 Matched engine: IE40F-5A
 Displacement(cc) : 42.7
 Standard power: 1.4Kw/6500r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.9
 Certificate: CE/EURO II

Feature

- ▶ **Light weight ,well balanced trimmer.**
- ▶ **Perfect for professional use**
- ▶ **The quick-release coupling enables the shaft to be separated into two easily transportable and storable parts and to be subsequently reassembled no tools required.**





BCN520

Pipe type: one whole straight shaft
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 28
 Handle: Double (Dual)handles
 Belt: Single double shoulder strap
 Weight(kg): 7.8
 Pipe length: 1500
 Cutting head: Big nylon cutter or metal blade
 Matched engine: IE44F-5A
 Displacement(cc) : 51.7
 Standard power: 1.7Kw/6500r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.9
 Certificate: CE/EURO II

Feature

- ▶ Light weight ,well balanced trimmer.
- ▶ Perfect for professional use



BCN520EU

Pipe type: one whole straight shaft
 Clutch connectors :Super Anti-vibration system
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 28
 Handle: Double (Dual)handles
 Belt: Single double shoulder strap
 Weight(kg): 7.8
 Pipe length: 1500
 Cutting head: Big nylon cutter or metal blade
 Matched engine: IE40F-5A
 Displacement(cc) : 51.7
 Standard power: 1.7Kw/6500r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.9

Feature

- ▶ Designed with reliable starting in mind, and thanks to durable engine and the simplified starting system this has been easily achieved. Powered by a low-emission. The 4 point antivibration system reduces user fatigue, ideal for contractors, landscapers and demanding property owners with large areas to maintain.
- ▶ Anti-vibration system Effectively damps vibration from the engine and cutting tool. Vibration at the handles is significantly reduced.
- ▶ The ergonomic bike handle can be easily adjusted to suit the operator using the central wing screw no tools required. 90° rotation for easy transportation and space-saving storage.





BCN520F

Pipe type: one whole straight shaft
 Clutch connectors :Super Anti-vibration system
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 28
 Handle: Double (Dual)handles
 Belt: Single double shoulder strap
 Weight(kg): 7.8
 Pipe length: 1500
 Cutting head: Big nylon cutter or metal blade
 Matched engine: IE40F-5A
 Displacment(cc) : 51.7
 Standard power: 1.7Kw/6500r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.9
 Certificate: CE/EURO II



BCN520S

Pipe type: 2-split parts, straight shaft
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 28
 Handle: Double (Dual)handles
 Belt: Single double shoulder strap
 Weight(kg): 8.1
 Pipe length: 1500
 Cutting head: Big nylon cutter or metal blade
 Matched engine: IE40F-5A
 Displacment(cc) : 51.7
 Standard power: 1.7Kw/6500r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.9
 Certificate: CE/EURO II





BG305

Matched engine: IE36F
Displacement(cc) : 32.5
Standard power: 0.8Kw/7000r/min
Form of carburettor: Diaphragm
Mixed fuel Ratio: 1:25
Tank capacity(L): 0.85
Diameter of Aluminium(mm): 26
Weight(kg): 9.9
Pipe length (mm) : 1550+800
Handle: D-type or b type
Cutting head: Nylon cutter or metal blade
Certificate: CE&GS
Packing way: 1 PCS in 2 cartons

BG328

Matched engine: IE36FB
Displacement(cc) : 32.5
Standard power: 0.8Kw/6500r/min
Form of carburettor: Diaphragm
Mixed fuel Ratio: 1:25
Tank capacity(L): 0.85
Diameter of Aluminium(mm): 26
Weight(kg): 9.9
Pipe length (mm) : 1500+800
Handle: D-type or b type
Cutting head: Nylon cutter or metal blade
Certificate: CE&GS
Packing way: 1 PCS in 2 cartons





BG360

Matched engine: CY139 4 stroke
 Displacement(cc) : 35.8
 Standard power: 1.1Kw/6500r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 90# petro
 Tank capacity(L): 0.85
 Diameter of Aluminium(mm): 28
 Weight(kg): 8.8
 Pipe length (mm) : 1500+800
 Handle: D-type or b type
 Cutting head: Nylon cutter or metal blade
 Packing way: 1 PCS in 2 cartons

BG415

Matched engine: IE40F-5
 Displacement(cc) : 42.7
 Standard power: 1.4Kw/6500r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.75
 Diameter of Aluminium(mm): 28
 Weight(kg): 9.8
 Pipe length (mm) : 1500+800 split
 Handle: D-type or b type
 Function: apply to the plaine,hills,terraced fields,such as the size of the triangular field and muddy fields,for harvesting wheat and barley,rice,beans,reefs,barley,alfalfa,fish and other grass crops
 Efficiency: single0.8-1.2mu/1 hour
 Weight(kg): 8.8kgs
 Cutting head: metal blade
 Certificate: CE&GS
 Packing way: 1 PCS in 2 cartons





BG520






























Matched engine: IE44F-5
 Displacement(cc) : 51.7
 Standard power: 1.7Kw/6500r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.85
 Diameter of Aluminium(mm): 28
 Weight(kg): 9.8
 Pipe length (mm) : 1500+800 split
 Handle: D-type or b type
 Function: apply to the plaine,hills,terraced fields,such as the size of the triangular field and muddy fields,for harvesting wheat and barley,rice,beans,reefs,barley,alfalfa,fish and other grass crops
 Efficiency: single0.8-1.2mu/1 hour
 Weight(kg): 8.8kgs
 Cutting head: metal blade
 Certificate: CE&GS
 Packing way: 1 PCS in 2 cartons

BG415D

Matched engine: IE40F-5
 Displacement(cc) : 42.7
 Standard power: 1.4Kw/6500r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.75
 Diameter of Aluminium(mm): 28
 Weight(kg): 9.8
 Pipe length (mm) : 1500+800 split
 Handle: D-type or b type
 Belt: Single double shouler strap
 Function: apply to the plaine,hills,terraced fields,such as the size of the triangular field and muddy fields,for harvesting wheat and barley,rice,beans,reefs,barley,alfalfa,fish and other grass crops
 Efficiency: single0.8-1.2mu/1 hour
 Weight(kg): 8.8kgs
 Cutting head: metal blade
 Certificate: CE&GS
 Packing way: 1 PCS in 2 cartons



BC Series General Information

Model Number	Goods Number	Displacement	Power	Shaft	Handle	Working ahead	Marks
BC260	 BC260B	25.4cc	0.7kw/7000R/Min	Complete curve	Loop handle "D"	Small Nylon cutter	Single shoulder strap
	 BC260BS	25.4cc	0.7kw/7000R/Min	2 splittable parts curve	Loop handle "D"	Small Nylon cutter	
BC260	 BC260	25.4cc	0.7kw/7000R/Min	complete whole	Double "J"	Big Nylon cutter	Metal blade
	 BC260S	25.4cc	0.7kw/7000R/Min	2 splittable shafts	Double "J"	Big Nylon cutter	Metal blade
	 BC260D	25.4cc	0.7kw/7000R/Min	complete whole	Loop handle "P"	Big Nylon cutter	Metal blade
	 BC260DS	25.4cc	0.7kw/7000R/Min	2 splittable shafts	Loop handle "P"	Big Nylon cutter	Metal blade
	 BC305	32.5cc	0.9kw/7000R/Min	complete whole	Double "J"	Big Nylon cutter	Metal blades
BC305	 BC305S	32.5cc	0.9kw/7000R/Min	2 splittable shaft	European style "U"	Big Nylon cutter	Metal blade
	 BC305F	32.5cc	0.9kw/7000R/Min	complete whole	Double "J"	Big Nylon cutter	Metal blade
	 BC305D	32.5cc	0.9kw/7000R/Min	complete whole	"P" loop grip handle	Big Nylon cutter	Metal blade
	 BC305DS	32.5cc	0.9kw/7000R/Min	2 splittable shaft	"P" loop grip handle	Big Nylon cutter	Metal blade
	 BC415EU	42.7cc	1.4kw/6500R/Min	complete whole	European Style "U"	Big Nylon cutter	Metal blade
BC415	 BC415	42.7cc	1.4kw/6500R/Min	Complete	Double "J"	Big Nylon cutter	Metal blade
	 BC415F	42.7cc	1.4kw/6500R/Min	complete whole	Double "J"	Big Nylon cutter	Metal blade
	 BC415S	42.7cc	1.4kw/6500R/Min	2 splittable shaft	Double "J"	Big Nylon cutter	Metal blade
	 BC520	52.7cc	1.7kw/6500R/Min	complete whole	Double "J"	Big Nylon cutter	Metal blade
	 BC415MKT	42.7cc	1.4kw/6500R/Min	complete whole	Double "J"	Big Nylon cutter	Anti-Vibration clutch connectors
BC520	 BC415F	52.7cc	1.7kw/6500R/Min	complete whole	Double "J"	Big Nylon cutter	Metal blade
	 BC520S	52.7cc	1.7kw/6500R/Min	2 splittable parts	European style "U"	Big Nylon cutter	Metal blade
	 BC360EU	35.6cc,4 stroke	1.0kw/6500R/Min	complete whole	European Style "U"	Big Nylon cutter	Super Vibration clutch connectors
BC360	 BC360	35.6cc,4 stroke	1.0kw/6500R/Min	complete whole	Double "J"	Big Nylon cutter	Metal blade
	 BC360S	35.6cc,4 stroke	1.0kw/6500R/Min	2 splittable parts	Double "J"	Big Nylon cutter	Metal blade
	 BC415-6	40.2cc	1.4kw/6500R/Min	complete whole	Double "J"	Big Nylon cutter	Metal blade
CY415-6	 CY415-6	40.2cc	1.4kw/6500R/Min	complete whole	Double "J"	Big Nylon cutter	Metal blade
	 CY415-6EU	40.2cc	1.4kw/6500R/Min	complete whole	Double "J"	Big Nylon cutter	SuperAnti- Vibration clutch connectors
BC415-6L	 BC415-6L	40.2cc	1.4kw/6500R/Min	complete whole	Double "J"	Big Nylon cutter	Metal blade
	 BC415MKT	40.2cc	1.4kw/6500R/Min	complete whole	Double "J"	Big Nylon cutter	Metal blade
BC415MKT	 BC415MKT	40.2cc	1.4kw/6500R/Min	complete whole	Double "J"	Big Nylon cutter	Metal blade
	 BC415MKT	40.2cc	1.4kw/6500R/Min	complete whole	Double "J"	Big Nylon cutter	Metal blade



Easy starter™ reduces recoil pulling force and makes it smoother in pulling operation.



Light weight

Our engine starts easily, and accelerates quickly. Engine weight is lighter, in comparison of its performance level.



Tough

Features a heat-treated, tough gearcase with a seal to stop the grease leakage. With a shape specially designed to prevent catching on grass, grease can be also supplied very easily thanks to the bolt opposite to the grease nipple.



Our engine produces the optimal power to work effectively. It also meets the emission standards for less emission. Low Vibration



Low vibration

Anti-vibration spring damper absorbs vibration and amplitude. It reduces the vibration transmitted to the users



Durability

Wrap-around stand, antidust net, and pro-grade paper air cleaner hold up in heavy use.



BC260

Pipe type: one whole straight shaft
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 24
 Handle: Double (Dual)handles
 Belt: Single
 Weight(kg): 4.8
 Pipe length: 1500
 Cutting head: Big nylon cutter
 Matched engine: IE34F
 Displacment(cc) : 25.4
 Standard power: 0.7Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.65
 Certificate: CE/EURO II



2 stroke engine powered trimmers are outstanding obviously as lightweight ,durable quality and exchangable parts with other models on the market,it was developped about 15 years in our company and its supply system are also stable and the cost is low,its function are just for grass trimmers,if want to relax, this model is your first choice





BC260B

Pipe type: one whole part ,curve shaft
 Type of shaft :flexible
 Diameter of inner shaft: 8mm
 Diameter of Aluminium(mm): 24
 Grip Handle: D-type or b type
 Belt: Single
 Weight(kg): 3.8
 Pipe length: 1500
 Cutting head: Small black nylon cutter
 Matched engine: IE34F
 Displacment(cc) : 25.4
 Standard power: 0.7Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.65
 Certificate: CE/EURO II
 Package size: (24+12)x26x164x1/2
 Quantity in container
 20'FCL : 340 sets
 650 sets
 40'HQ: 860 sets

BC260BS

Pipe type: 2-split parts ,curve shaft
 Type of shaft :Solid +flexible
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 24
 Grip Handle: D-type or b type
 Belt: Single
 Weight(kg): 3.9
 Pipe length: 1500
 Cutting head: Small black nylon cutter
 Matched engine: IE34F
 Displacment(cc) : 25.4
 Standard power: 0.7Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.65
 Certificate: CE/EURO II



The quick-release coupling enables the shaft to be separated into two easily transportable and storable parts and to be subsequently reassembled no tools required.





BC260D

Pipe type: one whole straight shaft
 Type of shaft :Solid
 Diameter of inner shaft: 8mm
 Diameter of Aluminium(mm): 24
 Grip Handle: D-type or b type
 Belt: Single
 Weight(kg): 3.9
 Pipe length: 1500
 Cutting head: Big Nylon cutter or metal blade
 Matched engine: IE34F
 Displacement(cc) : 25.4
 Standard power: 0.7Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.65
 Certificate: CE/EURO II

BC260DS

Pipe type: 2-split parts ,straight shaft
 Type of shaft: Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 24
 Grip Handle: D-type or b type
 Belt: Single
 Weight(kg): 4.0
 Pipe length: 1500
 Cutting head: Big Nylon cutter or metal blade
 Matched engine: IE34F
 Displacement(cc) : 25.4
 Standard power: 0.7Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.65
 Certificate: CE/EURO II



The quick-release coupling enables the shaft to be separated into two easily transportable and storable parts and to be subsequently reassembled no tools required.





BC260M

Pipe type: one whole part ,curve shaft
 Type of shaft :flexible
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 24
 Grip Handle: D-type or b type
 Belt: Single
 Weight(kg): 6.5
 Pipe length: 1500
 Cutting head: Small black nylon cutter
 Mower plate
 Matched engine: IE34F
 Displacement(cc) : 25.4
 Standard power: 0.7Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.65
 Certificate: CE/EURO II

BC260S

Pipe type: 2-split parts, straight shaft
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 24
 Handle: Double (Dual)handles
 Belt: Single
 Weight(kg): 5.3
 Pipe length: 1500
 Cutting head: Small black nylon cutter,metal blade
 Matched engine: IE34F
 Displacement(cc) : 25.4
 Standard power: 0.7Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.65
 Certificate: CE/EURO II



The quick-release coupling enables the shaft to be separated into two easily transportable and storable parts and to be subsequently reassembled no tools required.





BC260C

Pipe type: one whole straight shaft
 Type of shaft: Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 24
 Handle: Double (Dual)handles
 Belt: Single
 Weight(kg): 4.8
 Pipe length(mm): 1500
 Cutting head: Small black nylon cutter
 Matched engine: IE33F
 Displacement(cc) : 25.7
 Standard power: 0.65Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.65
 Certificate: CE/EURO II



BC260CB

Pipe type: one whole curve shaft
 Type of shaft :flexible
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 24
 Grip Handle: D-type or b type
 Belt: Single
 Weight(kg): 6.5
 Pipe length(mm): 1500
 Cutting head: Small black nylon cutter
 Matched engine: IE33F
 Displacement(cc) : 25.7
 Standard power: 0.65Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.65
 Certificate: CE/EURO II
 Package size: (24+12)x26x164x1/2
 Quantity in container
 20'FCL : 340 sets
 650 sets
 40'HQ: 860 sets





The quick-release coupling enables the shaft to be separated into two easily transportable and storable parts and to be subsequently reassembled no tools required.



BC260CBS

Pipe type: 2-split parts ,curve shaft
 Type of shaft :Solid +flexible
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 24
 Grip Handle: D-type or b type
 Belt: Single
 Weight(kg): 6.5
 Pipe length(mm): 1500
 Cutting head: Small black nylon cutter
 Matched engine: IE33F
 Displacement(cc) : 25.7
 Standard power: 0.65Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.65
 Certificate: CE/EURO II

BC260CS

Pipe type: 2-split parts, straight shaft
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 24
 Handle: Double (Dual)handles
 Belt: Single
 Weight(kg): 5.3
 Pipe length: 1500
 Cutting head: Small black nylon cutter,metal blade
 Matched engine: IE33F
 Displacement(cc) : 25.7
 Standard power: 0.65Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.65
 Certificate: CE/EURO II



The quick-release coupling enables the shaft to be separated into two easily transportable and storable parts and to be subsequently reassembled no tools required.



These models developments are long years with stable quality, parts supply systems are stable and complete. Now cost is lower and performance is quite satisfied. If you need to know more, please check all models one by one and you find which is your thinking!





BC305

Pipe type: one whole straight shaft
 Type of shaft :Solid
 Diameter of inner shaft: 8mm
 Diameter of Aluminium(mm): 28
 Handle: Double (Dual)handles
 Belt: Single double shoulder strap
 Weight(kg): 7.6
 Pipe length: 1500
 Cutting head: Big nylon cutter or metal blade
 Matched engine: IE36F
 Displacement(cc) : 32.5
 Standard power: 0.8Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.85
 Certificate: CE/EURO II

BC305D

Pipe type: one whole straight shaft
 Type of shaft :Solid
 Diameter of inner shaft: 8mm
 Diameter of Aluminium(mm): 28
 Grip Handle: D-type or b type
 Belt: Single double shoulder strap
 Weight(kg): 7.6
 Pipe length: 1500
 Cutting head: Big nylon cutter or metal blade
 Matched engine: IE36F
 Displacement(cc) : 32.5
 Standard power: 0.8Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.85
 Certificate: CE/EURO II





BC305DS

Pipe type: 2 split parts, straight shaft
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 28
 Grip Handle: D-type or b type
 Belt: Single double shoulder strap
 Weight(kg): 7.6
 Pipe length: 1500
 Cutting head: Big nylon cutter or metal blade
 Matched engine: IE36F
 Displacement(cc) : 32.5
 Standard power: 0.8Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.85
 Certificate: CE/EURO II



The quick-release coupling enables the shaft to be separated into two easily transportable and storable parts and to be subsequently reassembled no tools required.

BC305F



Pipe type: One whole part, straight shaft
 Clutch connectors :Anti-vibration system
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 28
 Grip Handle: D-type or b type
 Belt: Single double shoulder strap
 Weight(kg): 7.6
 Pipe length: 1500
 Cutting head: Big nylon cutter or metal blade
 Matched engine: IE36F
 Displacement(cc) : 32.5
 Standard power: 0.8Kw/7000r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.85
 Certificate: CE/EURO II





BC328

Matched engine: IE36F-B
 Displacement(cc) : 30.5
 Standard power: 0.8Kw/6500r/min
 Form of carburettor: Float
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.85
 Diameter of Aluminium(mm): 28
 Weight(kg): 8.7
 Pipe length (mm) : 1500
 Handle: "U"
 Belt: Single shoulder strap
 Cutting head: Nylon cutter or metal blade

BC360

Pipe type: one whole straight shaft
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 28
 Handle: Double (Dual)"U"handles
 Belt: Single double shoulder strap
 Weight(kg): 7.8
 Pipe length: 1500
 Cutting head: Big nylon cutter or metal blade
 Matched engine: CY139,4 stroke gasoline engine
 Displacement(cc) : 35.8
 Standard power: 1.1Kw/6500r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 90# petro
 Tank capacity(L): 0.85
 Certificate: CE/EURO II





BC360EU

Pipe type: one whole straight shaft
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 28
 Handle: Double (Dual)"U"handles
 Belt: Single double shoulder strap
 Weight(kg): 7.8
 Pipe length: 1500
 Cutting head: Big nylon cutter or metal blade
 Matched engine: CY139,4 stroke gasoline engi
 Displacement(cc) : 35.8
 Standard power: 1.1Kw/6500r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 90# petro
 Tank capacity(L): 0.85
 Certificate: CE/EURO II



BC360F

Pipe type: one whole straight shaft
 Clutch connectors Anti-vibration system
 Type of shaft :Solid
 Diameter of inner shaft: 8mm
 Diameter of Aluminium(mm): 28
 Handle: Double (Dual)"U"handles
 Belt: Single double shoulder strap
 Weight(kg): 7.8
 Pipe length: 1500
 Cutting head: Big nylon cutter or metal blade
 Matched engine: CY139,4 stroke gasoline engine
 Displacement(cc) : 35.8
 Standard power: 1.1Kw/6500r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 90# petro
 Tank capacity(L): 0.85
 Certificate: CE/EURO II





BC415

Pipe type: one whole straight shaft
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 28
 Handle: Double (Dual)handles
 Belt: Single double shoulder strap
 Weight(kg): 7.8
 Pipe length: 1500
 Cutting head: Big nylon cutter or metal blade
 Matched engine: IE40F-5
 Displacement(cc) : 42.7
 Standard power: 1.4Kw/6500r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.9
 Certificate: CE/EURO II

BC415F

Pipe type: one whole straight shaft
 Clutch connectors Anti-vibration system
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 28
 Handle: Double (Dual)handles
 Belt: Single double shoulder strap
 Weight(kg): 7.8
 Pipe length(mm): 1500
 Cutting head: Big nylon cutter or metal blade
 Matched engine: IE40F-5
 Displacement(cc) : 42.7
 Standard power: 1.4Kw/6500r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.9
 Certificate: CE/EURO II





BC415S

Pipe type: 2-split parts, straight shaft
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 28
 Handle: Double (Dual)handles
 Belt: Single double shoulder strap
 Weight(kg): 8.1
 Pipe length: 1500
 Cutting head: Big nylon cutter or metal blade
 Matched engine: IE40F-5
 Displacement(cc) : 42.7
 Standard power: 1.4Kw/6500r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.9
 Certificate: CE/EURO II



The quick-release coupling enables the shaft to be separated into two easily transportable and storable parts and to be subsequently reassembled no tools required.

BC415-6

Matched engine: IE40F-6
 Displacement(cc) : 40.2
 Standard power: 1.4Kw/6500R/Min
 Form of carburettor: Float type
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.85
 Diameter of Aluminium(mm): 28
 Weight(kg): 9.8
 Pipe length (mm) : 1500
 Handle: "U"
 Belt: Single shoulder strap
 Cutting head: Nylon cutter or metal blade
 Packing way: 1 PCS in 2 cartons





BC415-6L

Matched engine: IE40F-6L
 Displacement(cc) : 40.2
 Standard power: 1.4Kw/6500R/Min
 Form of carburettor: Float type
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.85
 Diameter of Aluminium(mm): 28
 Weight(kg): 9.8
 Pipe length (mm) : 1500
 Handle: "U"
 Belt: Single shoulder strap
 Cutting head: Nylon cutter or metal blade
 Packing way: 1 PCS in 2 cartons

BC415MKT

Matched engine: CYIE40F-6MKT
 Displacement(cc) : 40.2
 Standard power: 1.4Kw/6500R/Min
 Form of carburettor: Float type
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.85
 Diameter of Aluminium(mm): 28
 Weight(kg): 9.8
 Pipe length (mm) : 1500
 Handle: "U"
 Belt: Single shoulder strap
 Cutting head: Nylon cutter or metal blade
 Packing way: 1 PCS in 2 cartons





BC520

Pipe type: one whole straight shaft
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 28
 Handle: Double (Dual)handles
 Belt: Single double shoulder strap
 Weight(kg): 7.8
 Pipe length(mm): 1500
 Cutting head: Big nylon cutter or metal blade
 Matched engine: IE44F-5
 Displacement(cc) : 51.7
 Standard power: 1.7Kw/6500r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.9
 Certificate: CE/EURO II

BC520F

Pipe type: one whole straight shaft
 Clutch connectors :Anti-vibration system
 Type of shaft :Solid
 Diameter of inner shaft: 8mm
 Diameter of Aluminium(mm): 28
 Handle: Double (Dual)handles
 Belt: Single double shoulder strap
 Weight(kg): 7.8
 Pipe length(mm): 1500
 Cutting head: Big nylon cutter or metal blade
 Matched engine: IE44F-5
 Displacement(cc) : 51.7
 Standard power: 1.7Kw/6500r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.9
 Certificate: CE/EURO II





The quick-release coupling enables the shaft to be separated into two easily transportable and storable parts and to be subsequently reassembled no tools required.



BC520S

Pipe type: 2-split parts, straight shaft
 Type of shaft :Solid
 Diameter of inner shaft :8mm
 Diameter of Aluminium(mm): 28
 Handle: Double (Dual)handles
 Belt: Single double shoulder strap
 Weight(kg): 8.1
 Pipe length(mm): 1310
 Cutting head: Big nylon cutter or metal blade
 Matched engine: IE44F-5
 Displacement(cc) : 51.7
 Standard power: 1.7Kw/6500r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.9
 Certificate: CE/EURO II

BCT200

Matched engine: IE40F-3B
 Displacement(cc) : 40.6
 Standard power: 1.3Kw/7800r/min
 Form of carburettor: Float
 Mixed fuel Ratio: 25:1
 Tank capacity(L): 0.85
 Diameter of Aluminium(mm): 28
 Weight(kg): 8.8
 Pipe length (mm) : 1500
 Handle: "U"
 Belt: Single shouler strap
 Cutting head: Nylon cutter or metel blade
 Packing way: 1 PCS in 2 cartons





RC415

Matched engine: IE40F-5
 Displacement(cc) : 42.7
 Standard power: 1.3Kw/6500r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.85
 Diameter of Aluminium(mm): 28
 Weight(kg): 9.8
 Pipe length (mm) : 1500
 Handle: "U"
 Belt: Single double shoulder strap
 Function: apply to the plaine,hills,terraced fields,such as the size of the triangular field and muddy fields,for harvesting wheat and barley,rice,beans,reefs,barley,alfalfa,fish and other grass crops
 Efficiency: single 0.8-1.2mu/1 hour
 Loss rate: Less than 1%
 Weight(kg): 8.8kgs
 Cutting head: metal blade
 Certificate: CE&GS
 Packing way: 1 PCS in 2 cartons



Wheat cutter
Non-high plants cutters



Coil cutter
Suger cutter
.....
What you need to cut





RC411

Matched engine: IE40F-6
 Displacement(cc) : 40.2
 Standard power: 1.3Kw/6500r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.85
 Diameter of Aluminium(MM): 28
 Weight(kg): 9.8
 Pipe length (mm) : 1500
 Handle: "U"
 Belt: Single double shoulder strap
 Function: apply to the plaine,hills,terraced fields,such as the size of the triangular field and muddy fields,for harvesting wheat and barley,rice,beans,reefs,barley,alfalfa, fish and other grass crops
 Efficiency: single0.8-1.2mu/1 hour
 Loss rate: Less than 1%
 Weight(kg): 8.8kgs
 Cutting head: metal blade
 Certificate: CE&GS
 Packing way: 1 PCS in 2 cartons



RC260

Matched engine: IE34F
 Displacement(cc) : 25.4
 Standard power: 0.7Kw/6500r/min
 Form of carburettor: Diaphragm
 Mixed fuel Ratio: 1:25
 Tank capacity(L): 0.65
 Diameter of Aluminium(mm): 26
 Weight(kg): 9.8
 Pipe length (mm) : 1500
 Handle: "U"
 Belt: Single double shoulder strap
 Function: apply to the plaine,hills,terraced fields,such as the size of the triangular field and muddy fields,for harvesting wheat and barley,rice,beans,reefs,barley,alfalfa, fish and other grass crops
 Efficiency: single0.8-1.2mu/1 hour
 Loss rate: Less than 1%
 Weight(kg): 6.8kgs
 Cutting head: metal blade
 Certificate: CE&GS
 Packing way: 1 PCS in 2 cartons





CS37



Engine: single cylinder, two-stroke, air-cool
 Engine displacement: 36.3cc
 Maximum engine power: 1.5kw / 8000rpm
 Fuel tank capacity: 370(ml)
 Oil tank capacity: 190 (ml)
 Fuel: Mixture (Gasoline 25: Two cycle oil 1)
 Maximum engine speed with cutting attachment: 10000rpm
 Engine speed at idling: 3000rpm
 Maximum cutting length: 52 (cm)
 Sprocket: 7T x 0.325
 Carburetor diaphragm type/Walbro/Chinese
 Ignition system: C.D.I
 Starting System: Automatic recoil hand starter
 Saw chain type: Carlton/Tiger/Oregon/Chinese
 Saw chain pitch: 0.325(in)
 Saw chain gauge: 0.05(in)
 Guide bar type: Sprocket nose
 Guide bar size: 16" / 18"
 Oil feeding system: Automatic pump with adjuster
 Net Weight(without guide bar and chain): 5.8kg
 Gross weight(with 20"cutting attachment): 4.6Kg
 Packing size: 55 x47x32cm

CS38

Engine: single cylinder, two-stroke, air-cool
 Engine displacement: 37.2cc
 Maximum engine power: 1.5kw / 8000rpm
 Fuel tank capacity: 310(ml)
 Oil tank capacity: 210 (ml)
 Fuel: Mixture (Gasoline 25: Two cycle oil 1)
 Maximum engine speed with cutting attachment: 11500rpm
 Engine speed at idling: 3000rpm
 Maximum cutting length: 45(cm)
 Sprocket: 7T x 0.325
 Carburetor diaphragm type/Walbro/Chinese
 Ignition system: C.D.I
 Starting System: Automatic recoil hand starter
 Saw chain type: Carlton/Tiger/Oregon/Chinese
 Saw chain pitch: 3/8(in)
 Saw chain gauge: 0.05(in)
 Guide bar type: Sprocket nose
 Guide bar size: 14" / 16"/18"
 Oil feeding system: Automatic pump with adjuster
 Net Weight(without guide bar and chain): 4.8kg
 Gross weight(with 20"cutting attachment): 6.0Kg
 Packing size: 41x26.5x28cm





CS42



Engine: single cylinder, two-stroke, air-cool
Engine displacement: 40.2cc
Maximum engine power: 1.7kw / 8500rpm
Fuel tank capacity: 370(ml)
Oil tank capacity: 190 (ml)
Fuel: Mixture (Gasoline 25: Two cycle oil 1)
Maximum engine speed with cutting attachment: 10000rpm
Engine speed at idling: 3000rpm
Maximum cutting length: 52 (cm)
Sprocket: 7T x 0.325
Carburetor diaphragm type/Walbro/Chinese
Ignition system: C.D.I
Starting System: Automatic recoil hand starter
Saw chain type: Carlton/Tiger/Oregon/Chinese
Saw chain pitch: 0.325(in)
Saw chain gauge: 0.05(in)
Guide bar type: Sprocket nose
Guide bar size: 16" / 18"
Oil feeding system: Automatic pump with adjuster
Net Weight(without guide bar and chain): 4.6Kg
Gross weight(with 20"cutting attachment): 4.6Kg
Packing size: 55 x47x32cm

CS45

Engine: single cylinder, two-stroke, air-cool
Engine displacement: 45.0cc
Maximum engine power: 1.7kw / 7000rpm
Fuel tank capacity: 530(ml)
Oil tank capacity: 260(ml)
Fuel: Mixture (Gasoline 25: Two cycle oil 1)
Maximum engine speed with cutting attachment: 12500rpm
Engine speed at idling: 3000rpm
Maximum cutting length: 50(cm)
Sprocket: 7T x 0.325
Carburetor diaphragm type/Walbro/Chinese
Ignition system: C.D.I
Starting System: Automatic recoil hand starter
Saw chain type: Carlton/Tiger/Oregon/Chinese
Saw chain pitch: 0.325(in)
Saw chain gauge: 0.058(in)
Guide bar type: Sprocket nose
Guide bar size: 16"/18" / 20"/22"
Oil feeding system: Automatic pump with adjuster
Net Weight(without guide bar and chain): 5.8kg
Gross weight(with 20"cutting attachment): 6.9Kg
Packing size: 42x25x27.5cm





CS52



Engine: single cylinder, two-stroke, air-cool
 Engine displacement: 52.0cc
 Maximum engine power: 2.2kw / 8000rpm
 Fuel tank capacity: 530(ml)
 Oil tank capacity: 260(ml)
 Fuel: Mixture (Gasoline 25: Two cycle oil 1)
 Maximum engine speed with cutting attachment: 12500rpm
 Engine speed at idling: 3000rpm
 Maximum cutting length: 56(cm)
 Sprocket: 7T x 0.325
 Carburetor diaphragm type/Walbro/Chinese
 Ignition system: C.D.I
 Starting System: Automatic recoil hand starrer
 Saw chain type: Carlton/Tiger/Oregon/Chinese
 Saw chain pitch: 0.325(in)
 Saw chain gauge: 0.058(in)
 Guide bar type: Sprocket nose
 Guide bar size: 18" / 20"/22"
 Oil feeding system: Automatic pump with adjuster
 Net Weight(without guide bar and chain): 5.9kg
 Gross weight(with 20"cutting attachment): 7.2Kg
 Packing size: 43x26.5x30cm

CS22

Engine: single cylinder, two-stroke, air-cool
 Engine displacement: 22.2
 Maximum engine power: 0.74kw / 7000rpm
 Fuel tank capacity: 210(ml)
 Oil tank capacity: 180 (ml)
 Fuel: Mixture (Gasoline 25: Two cycle oil 1)
 Maximum engine speed with cutting attachment: 12500rpm
 Engine speed at idling: 3000rpm
 Maximum cutting length: 30(cm)
 Sprocket: 8T x 1/4"
 Carburetor diaphragm type/Walbro/Chinese
 Ignition system: C.D.I
 Starting System: Automatic recoil hand starrer
 Saw chain type: Carlton/Tiger/Oregon/Chinese
 Saw chain pitch: 1/4"
 Saw chain gauge: 0.050(in)
 Guide bar type: Sprocket nose
 Guide bar size: 10" / 12"
 Oil feeding system: Automatic pump with adjuster
 Net Weight(without guide bar and chain): 2.5kg
 Gross weight(with 20"cutting attachment): 3.4Kg
 Packing size: 33x27x23cm



CY326



Displacement: 32.6cm³
Max power : 0.72kw/8500r/min
Cylinder size: 36X32mm
Idle speed: 3000r/min
Starter system: hand-starter
2-cycle oil/gasoline mixing ratio:1:25
Fuel tank capacity: 370cm³
Carburetor: diaphragm
Chain oil tank capacity: 190cm³
Bar length: 10"
Chain: 0.325 Pitch
Chain gauge: 1.3mm
Carton dimensions*550*470*320mm
N.W./G.W.: 4.6/5.8 kg
Quantity:20*tdl: 1020pcs 40" HQ:2250PCS





SP415 (3WF-3)

Chemical Container Capacity(L): 15
 Liquid(kg/min): ≥ 1.7
 Powder (kg/min): ≥ 2
 Liquid (m): ≥ 9
 Fan speed: 7500-8000r/min
 Engine No.: 1E40F
 Displacement(cc): 41.5
 Rated power/Rev(KW/r/min) 2.3/7500
 Fuel Tank Capacity (L): 1.75
 Fuel consumption(g/kw:h) ≤ 530
 Engine style: single cylinder, air cooling
 Ignition C.D.I.
 Fuel Volume mix proportion of gasoline and engine oil :25-30:1
 Starting Mode: Leash start or Recoil start
 Net weight(Kg): 11.5
 Package size(mm): 52 x 43 x 68

3WF-3S


Chemical Container Capacity(L): 25
 Spraying Liquid Volume(L/min): ≥ 4
 Spraying Powder volume(kg/min) ≥ 6
 Spraying distance Liquid (m): ≥ 12
 Engine No.: IE40FP-3Z
 Displacement(cc): 41.5
 Rated power/Rev(KW/r/min) 2.3/7500
 Fuel Tank Capacity (L): 1.3
 Fuel consumption(g/kw:h) 670
 Engine style: single cylinder, air cooling, two stroke
 Ignition C.D.I.
 Fuel 25:1
 Starting Mode: Hand start or Recoil start
 Net weight(Kg): 8.5
 Package size(mm) :440X350X630





Orchard and garden: Apple, orange, pear, cherry, walnut, red dates, longan, litchi, peach, grape
Fields, crops: Cotton, corn, wheat, soybeans, rice, tobacco, strawberry, tea....

Greenhouse vegetables,
Greenhouse:
cucumber,
tomatoes and
peppers,
eggplant,
beans, vegetables

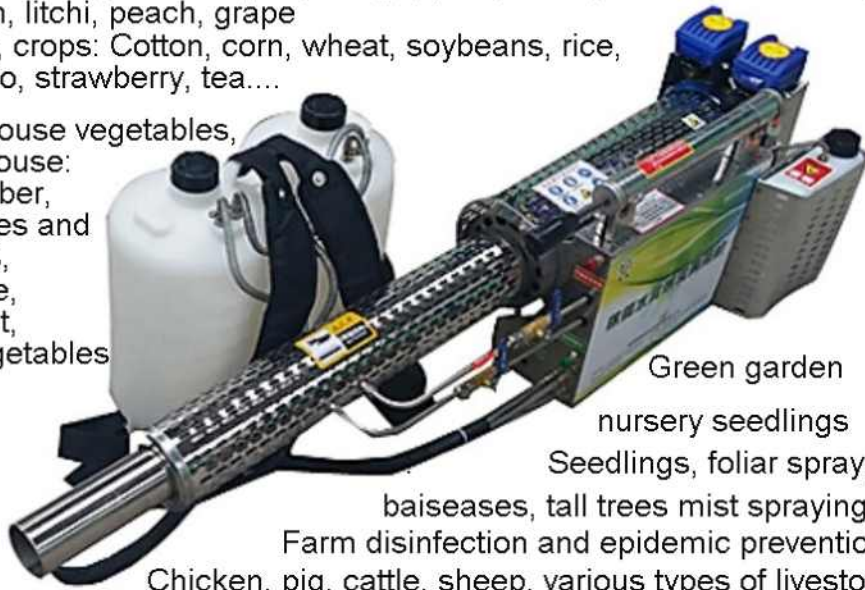

Green garden
nursery seedlings
Seedlings, foliar spray,
plant diseases, tall trees mist spraying...
Farm disinfection and epidemic prevention
Chicken, pig, cattle, sheep, various types of livestock breeding
Various places of disinfection and sterilization, disease prevention and control



A pulsejet engine is an air-breathing reaction engine employing a continuous sequence of discrete combustion events rather than





CY767

Chemical Container Capacity(L): 15/25
 Liquid(L/min): ≥ 4.0
 Liquid (m): ≥ 9
 Pump material heavy duty Copper
 Pump type high pressure piston pump
 Plunger dia 18mm
 Suction capacity: 8L/min
 Pumping pressure(Kg/): "15—25"
 Engine No.: IE34F
 Displacement(cc): 25.4
 Rated power/Rev(KW/r/min) 0.7/7000
 Fuel Tank Capacity (L): 0.9
 Fuel consumption(g/kw:h) 675
 Engine style: single cylinder, air cooling ,2 stroke
 Ignition C.D.I.
 Fuel 25:1
 Starting Mode: Hand start or Recoil start
 Net weight(Kg): 9.4
 Package size(mm) :440X350X630

CY769

Chemical Container Capacity(L): 15/25
 Liquid(L/min): ≥ 4.0
 Liquid (m): ≥ 9
 Pump material heavy duty Copper
 Pump type high pressure piston pump
 Plunger dia 18mm
 Suction capacity: 8L/min
 Pumping pressure(Kg/): "15—25"
 Engine No.: IE34F
 Displacement(cc): 25.4
 Rated power/Rev(KW/r/min) 0.7/7000
 Fuel Tank Capacity (L): 0.9
 Fuel consumption(g/kw:h) 675
 Engine style: single cylinder, air cooling ,2 stroke
 Ignition C.D.I.
 Fuel 25:1
 Starting Mode: Hand start or Recoil start
 Net weight(Kg): 9.4
 Package size(mm): 440X350X630





PJ80



Power: Pulse Jet Engine.
 Displacement: 80L
 Working temperatures:
 -10°C to 35°C, air humidity is 30-80%.
 Spray volume: 50-80L/h
 Fuel Consumption: 3.6L/h.
 Pesticide tank: 15L
 Fuel tank: 1.5L
 Net weight: 10.3kg
 Machines size: 1278mm×235mm×358mm
 Fuel: Petro, 93#
 Spark: 12V chargeable battery
 Twin carburetors double levels: Stronger power
 Start: Hand and electric
 Material: Stainless steel. Long life
 Non-stopped 360 degree rotation
 Life is above 10 years of family use
 This machine works better before sunrise or Sunset

Power: Pulse Jet Engine.
 Displacement: 90L
 Working temperatures:
 10°C to 35°C, air humidity is 30-80%.
 Spray volume: 50-80L/h
 Fuel Consumption: 3.6L/h.
 Pesticide tank: 15L
 Fuel tank: 1.5L
 Net weight: 13.5kg
 Machines size: 1278mm×235mm×358mm
 Fuel: Petro, 93#
 Spark: 12V chargeable battery
 Twin carburetors double levels: Stronger power
 Start: Hand and electric
 Material: Stainless steel. Long life
 Non-stopped 360 degree rotation
 Life is above 10 years of family use
 This machine works better before sunrise or Sunset

PJ90





HT230A



Blade Type: Single, back and forth move
 Blade Length: 750mm
 Effective cutting length: 650mm
 Cutter pitch: 35mm
 Width: 20mm
 Transmission way: Automatic centrifugal acceleration and declutching
 Engine: IE32F
 Engine Type: Air-cooled, two-stroke
 Displacement: 22.5cc
 Power: 0.6kw/6500rpm
 Start Method: Recoil
 Carburetor: Diaphragm, Pump-file type
 Gasoline/2-cycle oil mixing ratio: 25:1
 Fuel Tank Capacity: 0.6L
 Oil wear: 0.38L/H
 certificate CE certificate
 N.W/G.W: 11.2kgs/12.6kgs
 Carton: 117cm*25cm*29cm
 Case Qty: 2pcs
 20" Container: 650pcs
 40" Container: 1360pcs
 40 HQ: 1600pcs

HT230D

Engine: single cylinder, two-stroke, air-cool
 Engine displacement: 22.2
 Maximum engine power: 0.74kw / 7000rpm
 Fuel tank capacity: 210(ml)
 Oil tank capacity: 180 (ml)
 Fuel: Mixture (Gasoline 25: Two cycle oil 1)
 Maximum engine speed with cutting attachment: 12500rpm
 Engine speed at idling: 3000rpm
 Maximum cutting length: 30(cm)
 Sprocket: 8T x1/4"
 Carburetor diaphragm type/Walbro/Chinese
 Ignition system: C.D.I
 Starting System: Automatic recoil hand starter
 Saw chain type: Carlton/Tiger/Oregon/Chinese
 Saw chain pitch: 1/4"
 Saw chain gauge: 0.050(in)
 Guide bar type: Sprocket nose
 Guide bar size: 10" / 12"
 Oil feeding system: Automatic pump with adjuster
 Net Weight(without guide bar and chain): 2.5kg
 Gross weight(with 20" cutting attachment): 3.4Kg
 Packing size: 33x27x23cm





YJDY325

- Engine: 1E36F or 1E34F CY139
- A: Brushcutter Head
- B: Trimmer Head (Notice: The angle head is adjustable)
- Total length: 1.5m, blade: 650mm)
- C: Chainsaw Head
- Total length: 1.5m, board: 12inch
- D: Cultivator Head

CHAOYUE brand 4-attachment fits to your Power Unit without any effort, Can be used with most attachment capable major brands over the world.

Hedge trimmer. The adjustable angle Shaft make this a versatile and easy to use piece of machinery. The heavy duty gearbox is pre-loaded with special grease and is supplied with a grease nipple for fast and easy re-filling. This top specification hedge cutter can be quickly and easily adjusted to cut the tops of hedges on the completely horizontal position as well as the sides of the hedges in the completely vertical position. Stems up to 10mm in diameter can be easily and quickly cut. This attachment can come with a free extension bar. The total length of this attachment together with your Power unit and extension bar is approximately 2.2m (with 4 stroke power unit) or just over 2.0m with the 2 stroke power unit.

Chainsaw attachment, The Straight Shaft and heavy duty OREGON Cutting Chain make this versatile and easy to use piece of machinery. The total length of this attachment together with your Power unit is 1.8m. You may also purchase an extension bar to increase the length by a further 0.36m giving a total extension of 2.16m Tiller heads is more easy for you to use in house garden with brush cutter heads.



- 1E34F engine(25.4cc): BC260/S CYCS001 CYHG001 CYCV001
- 1E36F engine(32.5cc): BC305/S CYCS002 CYHG002 CYCV002



Model	ZDCQ20543	ZDCQ20553	ZDCQ20568	ZDCQ20571
Engine model	1E40F-5	IE44F-5	IE48F	IE50F-1
Engine type	air-cooled, 2-stroke, single cylinder			
Fuel Tank Capacity(L)	1.1L			
Displacement	42.7cc(52.7cc)	52.7cc	68cc	71cc
Max. engine power	1.4kw(1.7Kw)	1.7Kw	2.2Kw	2.4Kw
Gear ratio	34:1			
Maximum Engine speed	9500			
Clutch Speed	3700			
Idle speed	2700			
Auger speed	110-280			
Auger Diameters(mm)	110/150mm	110/150/200mm	150/200/300mm	200/300/400mm
Dilling length	730mm			
NW/GW(kg)	11.2/13.6	11.5/13.8	12.7/14.5	14.3/18.5



Model	ZDCQ20343	ZDCQ203ZD52	ZDZDCQ20368	ZDZDCQ20371
Engine model	1E40F-5	IE44F-5	IE48F	IE50F-1
Engine type	air-cooled, 2-stroke, single cylinder			
Fuel Tank Capacity(L)	1.1L			
Displacement	42.7cc(52.7cc)	52.7cc	68cc	71cc
Max. engine power	1.4kw(1.7Kw)	1.7Kw	2.2Kw	2.4Kw
Gear ratio	34:1			
Maximum Engine speed	9500			
Clutch Speed	3700			
Idle speed	2700			
Auger speed	110-280			
Auger Diameters(mm)	110/150mm	110/150/200mm	150/200/300mm	200/300/400mm
Dilling length	730mm			
NW/GW(kg)	11.2/13.6	11.5/13.8	12.7/14.5	14.3/18.5





EB420

Displacement(cc): 41.5
Rate Powe(Kw /Rpm): 1.6/6500
Operating Speed(RPM): 6600-8200
Idle Speed(R/min): 2800
Engine: 2-storke,air cool
Max Air Speed(Km/H): 250
Wind volume(m3/min): 12
Fuel Tank(L): 0.415
Carburettor: Chinese
Certificate CE
N.W(Kg): 5
G.W(Kg): 7
1pc/box: 50 x 34 x48

EB260

Displacement(cc): 25.7
Rate Powe(Kw): 0.75
Operating Speed(RPM): 6600-8200
Idle Speed(R/min): 2800
Engine: 2-storke,air cool
Max wind volume(ml/s) : 130
Max Air Speed(Km/H): 250
Suction Capacity(ml/s): 105
Fuel Tank(L): 0.65
Dust Bag(L): 35
Carburettor: Chinese
Certificate CE
N.W(Kg): 5
G.W(Kg): 7
1pc/box: 50 x 34 x48





EBV420

Displacement(cc): 41.5
 Rate Powe(Kw /Rpm): 1.6/6500
 Operating Speed(RPM): 6600-8200
 Idle Speed(R/min): 2800
 Engine: 2-storke,air cool
 Max Air Speed(Km/H): 250
 Wind volume(m3/min): 12
 Fuel Tank(L): 0.415
 Carburettor: Chinese
 Certificate CE
 N.W(Kg): 5
 G.W(Kg): 7
 1pc/box: 50 x 34 x48

EBV260

Displacement(cc): 33
 Rate Powe(Kw): 0.75
 Operating Speed(RPM): 6600-8200
 Idle Speed(R/min): 2800
 Engine: 2-storke,air cool
 Max Air Speed(Km/H): 250
 Suction Capacity(m3/min): 12
 Fuel Tank(L): 0.415
 Dust Bag(L): 35
 Carburettor: Chinese
 Certificate CE
 N.W(Kg): 5
 G.W(Kg): 7
 1pc/box: 50 x 34 x48



Chaoyue vacuum shredders are ideal for sucking up leaves and other light, loose debris out of corners, lightwells, gutters, paths, flowerbeds etc.



The impeller with rotary blade compresses dry leaves to as little as 1/14 of their original volume, making the most of the capacious collection



The chaozayue vacuum shredders can also be used as blowers, for thorough cleaning.



WP10B

lift H.max(m) :30M
 Suction(m) :8
 Engine type :1E40F-5
 Max output(KW) :1.3
 bore x stroke :40 x 34
 Displacement (cc) :42.7
 Suction & discharge dia :25.4mm(1")
 Ignition System :C.D.I
 Start Model :Manual
 Max. capacity :9m /h
 Self-primin time :65s/4m
 Air cleaner: semi-dry or oil bath type
 fuel tank Capacity :0.9L
 fuel consumption :583g/kw.h
 packing (mm) :35.6x37x28
 N.W(kg) :8
 G.W(kg) :9

WP10A(1")

lift H.max(m): 22
 Suction(m) :8
 Engine type :1E36F
 Max output(KW) :0.8
 bore x stroke :36x32mm
 Displacement :32.5cc
 Suction & discharge dia :25.4mm(1")
 Ignition System :C.D.I
 Start Model :Manual
 Max. capacity :8m /h
 Air cleaner :semi-dry or oil bath type
 fuel tank Capacity :0.84L
 fuel consumption :665g/kw.h
 packing (mm) :330 x 280 x 370
 N.W(kg) :8
 G.W(kg) :9



WP15E(2")

lift H.max(m) :30
 Suction(m) :8
 Engine type :1E40F-6
 Max output(KW) :1.4
 bore x stroke :44X34
 Displacement :40.2
 Suction & discharge dia :(2")
 Ignition System :C.D.I
 Start Model :Manual
 Max. capacity :10m /h
 Air cleaner :semi-dry or oil bath type
 fuel tank Capacity :0.9L
 fuel consumption :498.5g/kw.h
 packing (mm) :35.6X37X28
 N.W(kg) :8
 G.W(kg) :9



WPN527



Model Number	WPN152
Pump type	Centrifugal
Suction pipe diameter	1.5" / 38.1mm
Delivery pipe diameter	1.5" / 38.1mm
Max flow rate	300-330L/M
Max lift head	33-35m
Max suction head	6-8m
Engine number	IE44F-5
Engine displacement	52.7cc
Rated power	2.0hp(1.45kW)/6500rpm
Max torque	11N.m/2500rpm
Max speed	11000rpm
Idle speed	3300rpm
Fuel	25:01:00
Fuel tank	1.2 L



This pump structure is different from general pumps which are price-fighting and general performance.

Pumps have outstanding features:


- 1) Cost is lower
- 2) Lift height is much higher than general same engine
- 3) The flow is much higher than same engine power pump

Model	WPN2055	WPN2065	WPN2093	WPN20130
Water Pump Type	Centrifugal	Centrifugal	Centrifugal	Centrifugal
Outlet Size (inch)/(mm)	2.0" / 50	2" / 50	2" / 50	2" / 50
Inlet Size (inch)/(mm)	2.5" / 65	2" / 50	2" / 50	2" / 50
Displacement(L/M)	800	450	560	800
Lift(m)	63	63	65	65
Suction(m)	7	5--8	5--8	5--8
Engine Model	168F	152F	170F	190F
Recommend Power Using	5.5PS/3.8KW/3600RPM	6.5HP(5.0kW)/3600rpm	9.3HP(7.0kW)/3600rpm	13.0HP(7.0kW)/3600rpm
Engine displacement(cc)	196	98	208	420
Bore*stroke(mm)	68*54	52X46	70x55	90X66
Style of engine	3000	4 stroke ,Single-Cylinder,Forced Air Cooling,OHV	4 stroke ,Single-Cylinder,Forced Air Cooling,OHV	4 stroke ,Single-Cylinder,Forced Cooling,OHV
Start Model	Recoil Starter	Recoil	Recoil	Recoil
Fuel	90#	Unlead gasoline	Unlead gasoline	Unlead gasoline
Fuel Tank Capacity	3.6	1.3 L	3.6 L	6.5 L
Grease oil tank	0.6	0.45L	0.6L	1.1L
Fuel Consumption	378g/hp/hr	210 g/hp-hr	<374g/kW.h	<374g/kW.h
Packing Dimension	515*420*450	435X335X400mm	510X385X410mm	510X385X410mm
Net Weight(kgs)	24	16	23	29



The pump body is made of one poured die-casting parts, no air holes are avoided, leakage risk is lower, not easy to be broken. Especially its impellers structures is specialized for seal and high pressure, additionally, its material can be Alluminium alloy or iron. Pump body can be fixed with different engines

Model	WPN3093	WPN30130	WPN4093	WPN40130
Water Pump Type	Centrifugal	Centrifugal	Centrifugal	Centrifugal
Inlet Size (inch)/(mm)	3" /80	3" / 80	4" /100	4" /100
Outlet Size(inch)/(mm)	3" / 80	3" /80	4" / 100	4" 100
Displacement(L/M)	850	950	1500	2000
Lift(m)	65	65	63	60
Suction(m)	5-8	5-8	5-8	5-8
Engine Model	170F	190F	170F	190F
Recommend Power Using Engine	9.3HP(7.0kW)/3600rpm	13.0HP(7.0kW)/3600rpm	9.3HP(7.0kW)/3600rpm	13.0HP(7.0kW)/3600rpm
Engine displacement(cc)	208	420	208	420
Bore*stroke(mm)	70x55	90X66	70x55	90X66
Style of engine	4 stroke ,Single-Cylinder, Forced Air Cooling, OHV	4 stroke ,Single-Cylinder, Forced Air Cooling, OHV	4 stroke ,Single-Cylinder, Forced Air Cooling, OHV	4 stroke ,Single-Cylinder, Forced Air Cooling, OHV
Start Model	Recoil	Recoil	Recoil	Recoil
Fuel	Unlead gasoline	Unlead gasoline	Unlead gasoline	Unlead gasoline
Fuel Tank Capacity	3.6 L	6.5 L	3.6 L	6.5 L
Grease oil tank	0.6L	1.1L	0.6L	1.1L
Fuel Consumption	<374g/kW.h	<374g/kW.h	<374g/kW.h	<374g/kW.h
Packing Dimension	510X385X410mm	510X385X410mm	510X385X410mm	510X385X410mm
Net Weight(kgs)	26	39	23	45

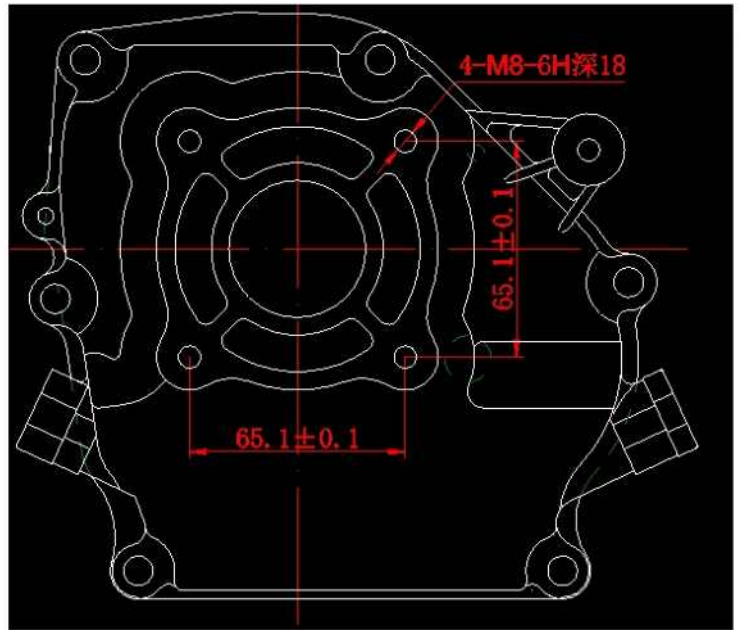

Engine



Model	WPND2065	WPND3093	WPND40130
Water Pump Type	Self-priming pump	Self-priming pump	Self-priming pump
Outlet Size (inch)/(mm)	2" / 50	3" / 80	4" / 100
Inlet Size(inch)/(mm)	2" / 50	3" / 80	4" 100
Displacement(L/M)	500	670	1750
Lift(m)	60	96	70
Suction(m)	80	5-8	5-8
Engine Model	178F	186F	192F
Recommend Power Using Engine displacement(cc)	6.5HP(5.0kW)/3600rpm	9.3HP(7.0kW)/3600rpm	13.0HP(7.0kW)/3600rpm
Bore*stroke(mm)	296	70x55	90X66
Style of engine	4 stroke ,Single-Cylinde,Forced Air Cooling,OHV	4 stroke ,Single-Cylinde,Forced Air Cooling,OHV	4 stroke ,Single-Cylinde,Forced Air Cooling,OHV
Start Model	Recoil	Recoil	Recoil
Fuel	Diesel	Diesel	Diesel
Fuel Tank Capacity	1.3 L	3.6 L	6.5 L
Grease oil tank	0.45L	0.6L	1.1L
Fuel Consumption	275 g/hp-hr	<275g/kW.h	<275g/kW.h
Packing Dimension	570X450X550mm	570X450X550mm	510X385X410mm
Net Weight(kgs)	52	72	45



Orchard and garden: Apple, orange, pear, cherry, walnut, red dates, longan, litchi, peach, grape
fields, crops: Cotton, corn, wheat, soybeans, rice, tobacco, strawberry, tea....

Greenhouse vegetables,
greenhouse:

Cucumber,
tomatoes and
peppers,
cabbage,
eggplant,
pumpkin vegetables



Green garden
nursery seedlings
Seedlings, foliar spray,
bacterial diseases, tall trees mist spraying...

Farm disinfection and epidemic prevention

Chicken, pig, cattle, sheep, various types of livestock breeding

Places of disinfection and sterilization, disease prevention and control



A pulsejet engine is an air-breathing reaction engine employing a continuous sequence of discrete combustion events rather than





PJ80



Power: Pulse Jet Engine.

Displacement: 80L

Working temperatures:

-10°C to 35°C, air humidity is 30-80%.

Spray volume: 50-80L/h

Fuel Consumption: 3.6L/h.

Pesticide tank: 15L

Fuel tank: 1.5L

Net weight: 10.3kg

Machines size: 1278mm×235mm×358mm

Fuel: Petro, 93#

Spark: 12V chargeable batter

Twin carburetors double levels: Stronger power

Start: Hand and electric

Material: Stainless steel. Long life

Non-stopped 360 degree rotation

Life is above 10 years of family use

This machine works better before sunrise or Sunset

Power: Pulse Jet Engine.

Displacement: 90L

Working temperatures:

10°C to 35°C, air humidity is 30-80%.

Spray volume: 50-80L/h

Fuel Consumption: 3.6L/h.

Pesticide tank: 15L

Fuel tank: 1.5L

Net weight: 13.5kg

Machines size: 1278mm×235mm×358mm

Fuel: Petro, 93#

Spark: 12V chargeable batter

Twin carburetors double levels: Stronger power

Start: Hand and electric

Material: Stainless steel. Long life

Non-stopped 360 degree rotation

Life is above 10 years of family use

This machine works better before sunrise or Sunset

PJ90





Rotor Drones Professional Agriculture UAV



Obvious Features

1. Light, flexible
2. Vibration is low
3. The drone can be fixed with precision instrument such as high-digital Camera
4. Working zone is not limited
5. Takeoff time is short, efficiency is high
6. Protection of environment, Zero emission
7. Maintenance cost is easy and economical
8. Water and pesticide is less than 40%
9. The fuelage of the drone uses one-time forming of all carbon fiber technology
10. Agricultural UAV designed with fire-proof, rainproof and dustproof

1. Extremely light weight, Maximum capacity of up to 20kgs

2. Plug structure design with tapered arm, convenient replacement and maintenance

3. Loose connection design patent, assembly without tool

4. High stability power device, dynamic Power redundancy

5. GPS hover, pointing flight and automatic route flight function

6. These models are used for pesticide sprayers with electric power and fire fighting

7. Low cost: Agricultural Unmanned Drone is sold by manufacture, so its prices are very competitive

8. Easy operation of agricultural drones can take off vertically, with effectively



lowers the operation difficulty and the risks. Flying at low altitude of several meters, the spraying effect can be controlled in the active area. It is suitable for all kinds of complex terrain farmlands, the crops at woods of different heights. The sprayer



operation skills of agriculture unmanned drones can be mastered via simple training

19. Environment-friendly: the dosage of pesticide is reduced, so it can minimize the pollution of pesticide to the environment and crops. It is not harmful to the operator in the distance when dusting, the labor intensity is reduced dramatically.

20. Excellent crop spraying: While it utilizes the strong downward rotating airflow to fly and shake the crops when spraying, it comes into being a turbulent area



ARDENTEC



Model	ZBJ10-8
unmanned aerial vehicle size	1400*1400*670mm
Foldable size	435*435*500mm(All are arms are aluminum)
unmanned aerial vehicle weight	7kg
Takeoff weight	30kg
Weight of Max Pesticide tank	10Kg (±5%)
Pesticide tank	20L
Rotor wing	15 inch,full carbon fiber
Rotor wing quantity	8 PCS
Sprayer system	Pesticide tank,diffusion spraying system,presure pump
Romote control	2.4G AT9
Romote control distance	2000m
Battle of power	High performance lithium polymer lithium battery 22.2V/16000mA/12000mA/24000mA
Charger	Lithium battery balance charging equipment
Plane self-stable system	fixed
Sprayers heads	diffusion sprayers
Speed of motor	1200RPM
Endurance	10-15 minutes
Spraying height	0-200m in field
Spraying wide	4m
Efficiency	1-3mu/Minute
Sprayer flow(Discharge)	0.25-0.75L/min
Flight speed	0-8m/Second
Flight height	0--200m
Hover	All direction
Flight attitude	All direction,rapid brake
Takeoff and landing time	Under 1 minute,Automatic drive system,vertical
Material of plane body	carbon fiber
Temperatures	from -15'c to 40'c
Times of charge of battery	300-500 times
Life of plane shelf	Above 5 years
Max efficiency of sprayer	200-300MU/day



ARDENTEC



Model	ZBJ10-6
unmanned aerial vehicle size	1100*1100*670mm
Foldable size	435*435*500mm(All are arms are alumnum)
unmanned aerial vehicle weight	7kg
Takeoff weight	30kg
Weight of Max Pesticide tank	6Kg (±5%)
Pesticide tank	20L
Rotor wing	15 inch,full carbon fiber
Rotor wing quantity	6 PCS
Sprayer system	Pesticide tank,diffusion spraying system,presure pump
Romote control	2.4G AT9
Romote control distance	2000m
Battle of power	High performance lithium polymer lithium battery 22.2V/16000mA/12000mA/24000mA
Charger	Lithium battery balance charging equipment
Plane self-stable system	Fixed
Sprayers heads	Diffusion sprayers
Speed of motor	1200RPM
Endurance	6-10 minutes
Spraying height	0-200m in field
Spraying wide	4m
Efficiency	1-3mu/Minute
Sprayer flow(Discharge)	0.25-0.75L/min
Flight speed	0-8m/Second
Flight height	0-200m
Hover	All direction
Flight attitude	All direction,rapid brake
Takeoff and landing time	Under 1 minute,Automatic drive system,vertical
Material of plane body	Carbon fiber
Temperatures	From -15'c to 40'c
Times of charge of battery	300-500 times
Life of plane shelf	Above 5 years
Max efficiency of sprayer	200-300MU/day



ARDENTEC



Model	ZBJ10-4
unmanned aerial vehicle size	1100*1100*670mm
Foldable size	435*435*500mm(All are arms are aluminum)
unmanned aerial vehicle weight	7kg
Takeoff weight	30kg
Weight of Max Pesticide tank	10Kg (±5%)
Pesticide tank	20L
Rotor wing	15 inch,full carbon fiber
Rotor wing quantity	4 PCS
Sprayer system	Pesticide tank,diffusion spraying system,presure pump
Romote control	2.4G AT9
Romote control distance	2000m
Battle of power	High performance lithium polymer lithium battery 22.2V/16000mA/12000mA/24000mA
Charger	Lithium battery balance charging equipment
Plane self-stable system	Fixed
Sprayers heads	Diffusion sprayers
Speed of motor	1200RPM
Endurance	6-10 minutes
Spraying height	0-200m in field
Spraying wide	4m
Efficiency	1-3mu/Minute
Sprayer flow(Discharge)	0.25-0.75L/min
Flight speed	0-8m/Second
Flight height	0--200m
Hover	All direction
Flight attitude	All direction,rapid brake
Takeoff and landing time	Under 1 minute,Automatic drive system,vertical
Material of plane body	Carbon fiber
Temperatures	From -15'c to 40'c
Times of charge of battery	300-500 times
Life of plane shelf	Above 5 years
Max efficiency of sprayer	200-300MU/day



INTELLIGENT SAFETY LOCK
LCD DISPLAY



58^V
MAX
LITHIUM
BATTERY/CHARGER

PRODUCT SPECIFICATION

BATTERY	
TPBT5620: 58V-2.0Ah	TPBT5640: 58V-4.0Ah
TPBT5625: 58V-2.5Ah	TPBT5650: 58V-5.0Ah

CHARGER	
Model: TPCH5602	TPCH5604
Input: 100-240Vac 50-60Hz	100-240Vac 50-60Hz
Output: 58V 2A 116W	58V 4A 232W

PRODUCT FEATURE

- ⦿ LCD display
- ⦿ Real time cell monitor
- ⦿ Smart electronic communication
- ⦿ Multi-layers of safety protection
- ⦿ Compatible for all TPT 58V Max tool



INTELLIGENT SAFETY LOCK
LCD DISPLAY

58^V
MAX
LITHIUM
CHAIN SAW



MODEL:TPCS5616

PRODUCT SPECIFICATION

Rated Voltage: 58V Max.	Bar Length: 16"/406mm
Chain Speed: 18m/s	Chain Pitch: 3/8"/9.525mm

PRODUCT FEATURE

- High performance brushless motor
- Chain brake system
- Variable speed switch
- Auto oil-pump
- Comfortable soft grip
- Tool-less chain tension mechanism
- Real gas power
- Upgrade compatible



UL Line Trimmer
MODEL:TPLT5616



Anti-loose string head
Cutting diameter: 406mm
Low noise twist string: 2.4mm



CE Line Trimmer
MODEL:TPLT5615



Brush Cutter
MODEL:TPBC5626

58^V
MAX
LITHIUM
LINE TRIMMER/BRUSH CUTTER

PRODUCT SPECIFICATION

MODEL:TPLT5616	MODEL:TPLT5615	MODEL:TPBC5626
Rated Voltage: 58V Max.	Rated Voltage: 58V Max.	Rated Voltage: 58V Max.
Speed: ~6500 RPM	Speed: ~6500 RPM	Speed: ~6500 RPM
Cutting Swath: 16"	Cutting Swath: 380mm	Cutting Swath: 260mm
Line Diameter: 0.08"/0.095"	Line Diameter: 2mm	

PRODUCT FEATURE

- ⦿ High performance brushless motor
- ⦿ Bump feed anti-loose string head
- ⦿ Variable speed switch
- ⦿ Gas power
- ⦿ Comfortable soft grip
- ⦿ Quiet and low vibration
- ⦿ Anti-loose string head
- ⦿ Upgrade compatible



MULTI FUNCTION POWER HEAD

Capable for 15+ attachment

MODEL:TPPH5601

ATTACHMENT

- | | |
|------------------------|--------------------------|
| 01 Curve Shaft Trimmer | 09 Coffee Picker |
| 02 Tiller | 10 Sickle |
| 03 Edger | 11 Impact Axe |
| 04 Olive Harvester | 12 Articulating Pole Saw |
| 05 Flex Mower | 13 Water Pump |
| 06 Brush Cutter | 14 Pole Saw |
| 07 Blower | 15 Pole Hedge Trimmer |
| 08 Snow Plow/Cleaner | |





INTELLIGENT
SAFETY LOCK

LCD DISPLAY

58^V
MAX
LITHIUM
PRUNER



Operating time
more than 4hours

MODEL:TPLP5630

PRODUCT SPECIFICATION

Rated Voltage: 58V Max.
Cutting Diameter: 35mm

PRODUCT FEATURE

- Brushless motor, high efficiency, high torque
- Mg. alloy shell
- Comfortable soft grip
- Smart blade movement control
- Over 2000 cuts for each charge
- Upgrade compatible



180°Rotation 5 Position

58^v
MAX
LITHIUM
HEDGE TRIMMER

PRODUCT SPECIFICATION

MODEL:TPHT5630	MODEL:TPHT5618
Rated Voltage: 58V Max.	Rated Voltage: 58V Max.
Speed: 3000 SPM	Speed: 3000 SPM
Blade Length: 550mm	Blade Length: 24 inch
Cutting Capacity: 30mm	Cutting Capacity: 3/4 inch

PRODUCT FEATURE

- ⦿ Brushless motor
- ⦿ Interlock mechanism rotating rear handle
- ⦿ Blade easy replaceable mechanism
- ⦿ 2 Handles control
- ⦿ Comfortable soft grip
- ⦿ Diamond ground blade
- ⦿ Upgrade compatible



58^V
MAX
LITHIUM
BLOWER



INTELLIGENT
SAFETY LOCK

LCD DISPLAY



Tube length adjustable



Turbo charging switch

Switch trigger with lock on

Variable speed switch dial

MODEL: TPBL5605

PRODUCT SPECIFICATION

Rated Voltage: 58V Max Air Speed: 250km/hr 130mph

PRODUCT FEATURE

- Lock on feature switch
- Adjustable tube length
- Variable speed switch dial
- Transparent air tube
- Comfortable soft grip
- Upgrade compatible
- Turbo charging function





58^V
MAX
LITHIUM
LAWN MOWER



MODEL:TPLM5620

PRODUCT SPECIFICATION

Rated Voltage:	58V Max
Deck:	20 inch/50cm
Blade:	19 inch/48cm
Height Adjustment:	5 Position 20~80mm

PRODUCT FEATURE

- ⦿ Two batteries auto switch for extended run time
- ⦿ Independent self-propell control system
- ⦿ 10 inch big wheel for easy movement
- ⦿ 3 in 1 feature
- ⦿ Constant speed control, boost power for heavy duty
- ⦿ Electronic brake system
- ⦿ Upgrade compatible






 GARDENTEC

美... 原木定制: 枫树



THREE SIZE:16" 18" 20"



CUT WOOD



CUT STEEL

L-004 230mm

CUT CONCRETE OR CERAMIC



WITH THREE BLADES



12"



L-003



PRUNING SAW



P-401



P-407



P-402



P-408



P-403



P-409



P-404



P-415



P-416





P-406



P-419



P-419B



P-420




G-001 4.9M



G-002 2.4M

GARDENTEC

PRUNING & CAMPING SAW





P-414B



P-419B



P-415B



P-420B



P-416B

7/20/20



P-449B



P-450B



P-450C




P-451B



P-451C



FOLDING SAW





Cuts 50% Faster
Than Conventional
Saws



C-4022



C-4027



C-4023



C-4028



C-4024



C-4025



L-001



C-4026



L-002

JAB SAW



C-4029



C-4033



C-4030



C-4034



C-4031



C-4035



C-4032



C-4037



C-4032A



C-4039



C-4039A



C-4048



C-4040



C-4111



C-4043



C-4112



C-4045



C-4120



C-4047



C-4121

GARDENTEC

JAB SAW



C-4122



C-4130



C-4131



CONCRETE SAW



- ◆ saw blade adopts 65 manganese with depth of 1.4mm;
- ◆ the tooth tips are jointed with Cemented carbide,which save a lot of strength during operation,and cut quite easily especially for cement wall;



C-126



C-127



C-1001



C-1004



C-1002



C-1005



C-1003



C-1007



C-1008



C-1010



C-1011



Cuts 50% Faster
Than Conventional
Saws



C-1012



C-1022



C-1014



C-1027



C-1015



C-1028



C-1017B




C-1029



C-1021



C-1031



C-1033



C-1107



C-1101



C-1108



C-1102



C-1108B



C-1103



C-1109



C-1105




C-1109A



C-1106



C-1109B



C-1110



C-1208



C-1112



C-1209



C-1120



C-1210



C-1122



C-1212



C-1202




C-2001



C-1203





C-1110



C-1208



C-1112



C-1209



C-1120



C-1210



C-1122



C-1212



C-1202




C-2001




C-1203




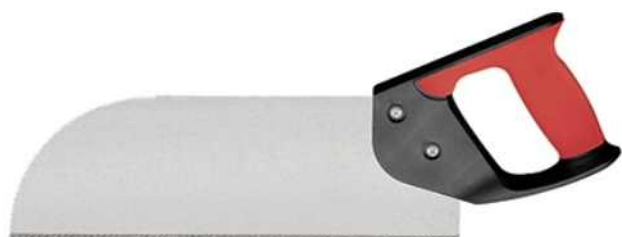


C-3001

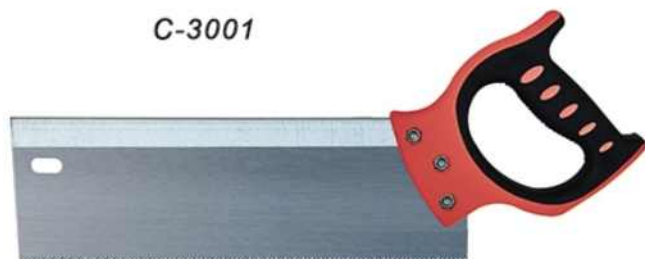


C-3004

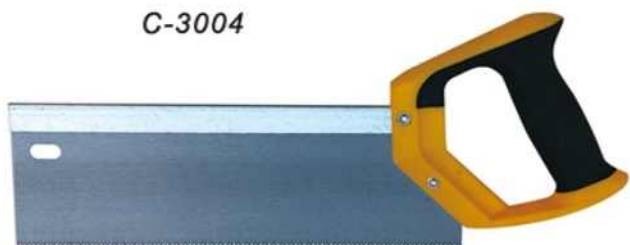


C-3006

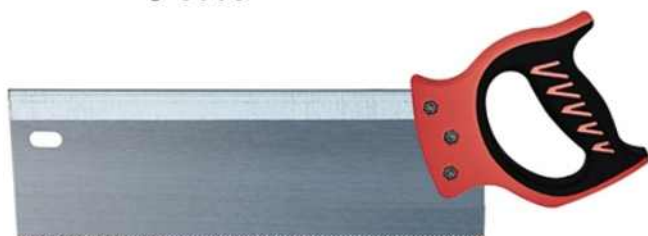

C-3019

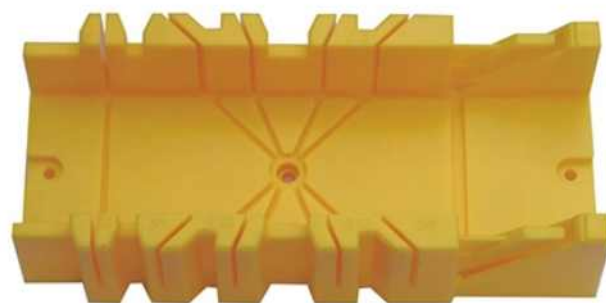

C-3006斜锯合

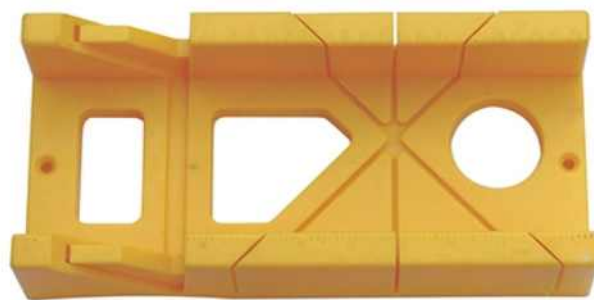

C-3007斜锯合



UNDERCUT SAW



C-501



C-503



C-502



C-5010



C-5014

COMPASS SAW



型号Model	H M900
引擎型号 Engine Model	168FB
引擎功率 Engine Power	3.5kW/3600rpm
缸径×行经 Bore×Stroke	68×54mm
压缩比 Compression ratio	8.5:1
排量 Displacement	196ml
燃油消耗率 Fuel consumption	≤395g/kw.h
启动方式 Starting system	手启动Recoil start
油箱容积Fuel tank capacity	3.6L
机油容积Oil capacity	0.6L
耕幅 Working width	950mm
耕深 Working depth	≥100mm
变速档数Gearshift speed	-1,0,1,2
传动方式Driving model	皮带 Belt
旋耕刀直径 Blade dia.	360mm
净重 N.W	66kg
毛重G.W	70kg
尺寸M.T	820×375×760mm



型号Model	H M500
引擎型号 Engine Model	168FB
引擎功率 Engine Power	3.5kW/3600rpm
缸径×行程 Bore×Stroke	68×54mm
压缩比 Compression ratio	8.5:1
排量 Displacement	196ml
燃油消耗率 Fuel consumption	≤395g/kw.h
启动方式 Starting system	手启动Recoil start
油箱容积Fuel tank capacity	3.6L
机油容积Oil capacity	0.6L
耕幅 Working width	950mm
耕深 Working depth	≥100mm
变速档数Gearshift speed	-1,0,1,2
传动方式Driving model	皮带 Belt
旋耕刀直径 Blade dia.	360mm
净重 N.W	66kg
毛重G.W	70kg
尺寸M.T	820×375×760mm

BELOW HANDLE BAR CAN BE CHOOSE FOR HM500 AND HM900



Old type handel



A type handle



C type handle



F type handle



G type handle

BELOW FRONT ACCESSORY CAN BE CHOOSE FOR HM500 AND HM900



Cover and lamp



frame and lamp



front wheel



front mower shaft



front bracket

Below accessory can fit on HM500 AND HM900

No.3



No.5



No.6



No.9



No.10



No.11



No.12



No.15



No.16



No.17



No.18



No.19





gasoline vertical shaft tiller



Loncin engine
196CC vertical engine
New design air filter
Vertical gear box



型号Model	HM4. 1G
引擎型号Engine model	IP70
引擎功率Engine power	4.05kw/3600rpm
启动方式starting system	handle start
耕宽working width	950mm
耕深working depth	100-180mm
档位gearshift speed	0, 1
净重net weight	55KGS
毛重gross weight	65KGS
尺寸size:	820*450*700MM

Below accessory can f

No.3



No.5



No.6



No.9



No.10



No.





diesel vertical shaft tiller

型号Model	HM4. 1D
引擎型号Engine model	173F
引擎功率Engine power	4.05kw/3600rpm
启动方式starting system	handle start
耕宽working width	950mm
耕深working depth	100-180mm
档位gearshift speed	0, 1
净重net weight	65KGS
毛重gross weight	75KGS
尺寸size:	820*450*700MM



n Vertical shaft tiller

No.12



No.16



No.17



No.18



No.19





GASOLINE POWER TILLER GEAR DRIVING

HM1350G-1

型号 Model	HM1350G-1
引擎型号 Engine Model	HM188F
引擎功率 Engine Power	13HP/3600RPM
缸径×行程 Bore×Stroke	88*64MM
压缩比 Compression ratio	8.0:1
排量 Displacement	390ML
燃油消耗率 Fuel consumption	≤374g/kw.h
启动方式 Starting system	recoil start
油箱容积 Fuel tank capacity	6.5L
机油容积 Oil capacity	1.1L
耕幅 Working width	100-300MM
耕深 Working depth	1350MM
变速档数 Gearshift speed	-1,0,2,1
传动方式 Driving model	GEAR DRIVING
旋耕刀直径 Blade dia.	300MM
净重 N. W	130KGS
毛重 G. W	135KGS
尺寸 M. T	1000*550*780MM



1 DIFFERENTIAL DESIGN CAN BE FIXED ON THIS TILLER
 2 -1,0,1,2,3 3-FORWARD AND 1-REVERSE CAN FIXED ON THIS TILLER
 3 LOWER SPEED GEAR BOX CAN BE CHOISE



型号Model	HM1350G-2
引擎型号 Engine Model	HM173F
引擎功率 Engine Power	9HP/3600RPM
缸径×行经 Bore×Stroke	73*58MM
压缩比 Compression ratio	8.0:1
排量 Displacement	242ML
燃油消耗率 Fuel consumption	≤374g/kw.h
启动方式 Starting system	recoil start
油箱容积Fuel tank capacity	5.0L
机油容积Oil capacity	1.1L
耕幅 Working width	100-300MM
耕深 Working depth	1350MM
变速档数Gearshift speed	-1,0,2,1
传动方式Driving model	GEAR DRIVING
旋耕刀直径 Blade dia.	300MM
净重 N. W	125KGS
毛重G. W	130KGS
尺寸M. T	1000*550*780MM



型号Model	HM1100G
引擎型号 Engine Model	HM170F
引擎功率 Engine Power	7HP/3600RPM
缸径×行经 Bore×Stroke	70*54MM
压缩比 Compression ratio	8.0:1
排量 Displacement	210ML
燃油消耗率 Fuel consumption	≤374g/kw.h
启动方式 Starting system	recoil start
油箱容积Fuel tank capacity	3.6L
机油容积Oil capacity	0.3L
耕幅 Working width	100-300MM
耕深 Working depth	1050MM
变速档数Gearshift speed	-1,0,2,1
传动方式Driving model	GEAR DRIVING
旋耕刀直径 Blade dia.	300MM
净重 N. W	110KGS
毛重G. W	115KGS
尺寸M. T	1000*550*780MM

型号Model	HM950G
引擎型号 Engine Model	HM170F
引擎功率 Engine Power	7HP/3600RPM
缸径×行经 Bore×Stroke	70*54MM
压缩比 Compression ratio	8.0:1
排量 Displacement	210ML
燃油消耗率 Fuel consumption	≤374g/kw.h
启动方式 Starting system	recoil start
油箱容积Fuel tank capacity	3.6L
机油容积Oil capacity	0.6L
耕幅 Working width	100-300MM
耕深 Working depth	1350MM
变速档数Gearshift speed	-1,0,2,1
传动方式Driving model	GEAR DRIVING
旋耕刀直径 Blade dia.	300MM
净重 N. W	90KGS
毛重G. W	95KGS
尺寸M. T	840*450*780MM





STARDENTEC



DIESEL POWER TILLER GEAR DRIVING

- 1 DIFFERENTIAL DESIGN CAN BE FIXED ON THIS TILLER
- 2 -1,0,1,2,3 3-FORWAR AND 1-REVERSE CAN FIXED ON THIS TILLER
- 3 LOWER SPEED GEAR BOX CAN BE CHOOSE



STARDENTEC



型号Model	1WG4.0-95FC-Z
引擎型号 Engine Model	Diesel 170F
引擎功率 Engine Power	3.5KW/3600RPM
排量 Displacement	210ml
燃油消耗率 Fuel consumption	≤420g/kw.h
启动方式 Starting system	手启动Recoil start
点火方式 Ignition type	压燃compress
耕幅 Working width	950mm
耕深 Working depth	≥100mm
变速档数Gearshift speed	-1,0,1,2
传动方式Driving model	齿轮 Gear
旋耕刀直径 Blade dia.	380mm
净重 N.W	90kg
毛重G.W	95kg
尺寸M.T	760×420×800mm



型号Model	1WG4.0-105FC-Z
引擎型号 Engine Model	Diesel 178F
引擎功率 Engine Power	4.0kW/3600rpm
排量 Displacement	296ml
燃油消耗率 Fuel consumption	≤420g/kw.h
启动方式 Starting system	手启动Recoil start
点火方式 Ignition type	压燃compress
耕幅 Working width	1050mm
耕深 Working depth	≥100mm
变速档数Gearshift speed	-1,0,1,2
传动方式Driving model	齿轮 Gear
旋耕刀直径 Blade dia.	380mm
净重 N.W	115kg
毛重G.W	120kg
尺寸M.T	1050×560×840mm

型号Model	1WG6.3-135FC-Z
引擎型号 Engine Model	Diesel 186F
引擎功率 Engine Power	6.3kW/3600rpm
排量 Displacement	406ml
燃油消耗率 Fuel consumption	≤420g/kw.h
启动方式 Starting system	手启动Recoil start
点火方式 Ignition type	压燃compress
耕幅 Working width	1350mm
耕深 Working depth	≥100mm
变速档数Gearshift speed	-1,0,1,2
传动方式Driving model	齿轮 Gear
旋耕刀直径 Blade dia.	380mm
净重 N.W	125kg
毛重G.W	130kg
尺寸M.T	1050×560×840mm





型号Model	1WG4.0-105FC-Z
引擎型号 Engine Model	Diesel 178F
引擎功率 Engine Power	4.0kW/3600rpm
排量 Displacement	296ml
燃油消耗率 Fuel consumption	≤420g/kw.h
启动方式 Starting system	手启动Recoil start
点火方式 Ignition type	压燃compress
耕幅 Working width	1050mm
耕深 Working depth	≥100mm
变速档数 Gearshift speed	-1,0,1,2
传动方式 Driving model	齿轮 Gear
旋耕刀直径 Blade dia.	380mm
净重 N.W	115kg
毛重 G.W	120kg
尺寸 M.T	1050×560×840mm

型号Model	1WG6.3-135FC-Z
引擎型号 Engine Model	Diesel 186F
引擎功率 Engine Power	6.3kW/3600rpm
排量 Displacement	406ml
燃油消耗率 Fuel consumption	≤420g/kw.h
启动方式 Starting system	手启动Recoil start
点火方式 Ignition type	压燃compress
耕幅 Working width	1350mm
耕深 Working depth	≥100mm
变速档数 Gearshift speed	-1,0,1,2
传动方式 Driving model	齿轮 Gear
旋耕刀直径 Blade dia.	380mm
净重 N.W	125kg
毛重 G.W	130kg
尺寸 M.T	1050×560×840mm



BELOW HANDLE CAN BE FIT ON GEAR DRIVING TILLER



A TYPE HANDLE



B TYPE HANDLE



C TYPE HANDLE



G TYPE HANDLE



I TYPE HANDLE





BELOW FRONT ACCESSORY CAN FIT ON GEAR DRIVING TILLER



frame and lamp



front wheel



front bracket

ACCESSORY

<p>no.1</p>	<p>no.2</p>	<p>no.3</p>	<p>no.4</p>	<p>no.5</p>
<p>no.6</p>			<p>no.7</p>	<p>no.8</p>
<p>no.10</p>	<p>no.11</p>	<p>no.12</p>	<p>no.13</p>	<p>no.14</p>
<p>no.15</p>	<p>no.16</p>	<p>no.17</p>	<p>Wheel type no.18</p> <p>3.50-6 4.00-8 5.00-12 6.00-12</p>	
<p>no.19</p>	<p>no.20</p>	<p>no.21</p>	<p>no.22</p>	





MAKE IDEAL POWER

gasoline engine



动力型号	Model	HM168FA
缸径×行径	Bore×Stroke	68×45 mm
排量	Displacement	163 ml
润滑方式	Lubricating type	Splashing
额定功率	Rated power (kW/rpm)	3.2/3600
最大扭矩	Max.torque (N.m/rpm)	9.0/2500
燃油消耗率	Fuel consumption	≤395g/kW.h
压缩比	Compression ratio	8.5:1
启动方式	Starting system	recoil start
点火系统	Ignition system	induction ignition
燃油容积	Fuel tank capacity	3.6L
机油容积	Lube capacity	0.6L
动力类型	Engine type	single cylinder,4-stroke
净重	Net weight	15kg
毛重	Gross weight	16kg
尺寸	Dimension	410*380*400MM



动力型号	Model	HM168FB
缸径×行径	Bore×Stroke	68×54 mm
排量	Displacement	196 ml
润滑方式	Lubricating type	Splashing
额定功率	Rated power (kW/rpm)	3.5/3600
最大扭矩	Max.torque (N.m/rpm)	10 /2500
燃油消耗率	Fuel consumption	≤395g/kW.h
压缩比	Compression ratio	8.5:1
启动方式	Starting system	recoil start
点火系统	Ignition system	induction ignition
燃油容积	Fuel tank capacity	3.6L
机油容积	Lube capacity	0.6L
动力类型	Engine type	single cylinder,4-stroke
净重	Net weight	15kg
毛重	Gross weight	16kg
尺寸	Dimension	410*380*400MM



动力型号	Model	HM170F
缸径×行径	Bore×Stroke	70×54 mm
排量	Displacement	210 ml
润滑方式	Lubricating type	Splashing
额定功率	Rated power (kW/rpm)	3.8/3600
最大扭矩	Max.torque (N.m/rpm)	10 /2500
燃油消耗率	Fuel consumption	≤395g/kW.h
压缩比	Compression ratio	8.5:1
启动方式	Starting system	recoil start
点火系统	Ignition system	induction ignition
燃油容积	Fuel tank capacity	3.6L
机油容积	Lube capacity	0.6L
动力类型	Engine type	single cylinder,4-stroke
净重	Net weight	15kg
毛重	Gross weight	16kg
尺寸	Dimension	410*380*400MM



gasoline engine



动力型号	Model	HM170F- 1/2
缸径×行径	Bore×Stroke	70×54 mm
排量	Displacement	210 ml
润滑方式	Lubricating type	Splashing
额定功率	Rated power (kW/rpm)	3.8/1800
最大扭矩	Max.torque (N.m/rpm)	10 /2500
燃油消耗率	Fuel consumption	≤395g/kW.h
压缩比	Compression ratio	8.5:1
启动方式	Starting system	recoil start
点火系统	Ignition system	induction ignition
燃油容积	Fuel tank capacity	3.6L
机油容积	Lube capacity	0.6L
动力类型	Engine type	single cylinder,4-stroke
净重	Net weight	15kg
毛重	Gross weight	16kg
尺寸	Dimension	410*380*400MM



动力型号	Model	HMI152F
缸径×行径	Bore×Stroke	52×46 mm
排量	Displacement	97 ml
润滑方式	Lubricating type	Splashing
额定功率	Rated power (kW/rpm)	1.1/3600
最大扭矩	Max.torque (N.m/rpm)	3.2/2500
燃油消耗率	Fuel consumption	≤445g/kW.h
压缩比	Compression ratio	8.5:1
启动方式	Starting system	recoil start
点火系统	Ignition system	induction ignition
燃油容积	Fuel tank capacity	1.3 L
机油容积	Lube capacity	0.3L
动力类型	Engine type	single cylinder,4-stroke
净重	Net weight	9.0kg
毛重	Gross weight	10 kg
尺寸	Dimension	310*295*380MM



动力型号	Model	HM173F
缸径×行径	Bore×Stroke	73×58 mm
排量	Displacement	242 ml
润滑方式	Lubricating type	Splashing
额定功率	Rated power (kW/rpm)	5.4/3600
最大扭矩	Max.torque (N.m/rpm)	13 /2500
燃油消耗率	Fuel consumption	≤445g/kW.h
压缩比	Compression ratio	8.5:1
启动方式	Starting system	recoil start
点火系统	Ignition system	induction ignition
燃油容积	Fuel tank capacity	6.0 L
机油容积	Lube capacity	1.1L
动力类型	Engine type	single cylinder,4-stroke
净重	Net weight	26 kg
毛重	Gross weight	27 kg
尺寸	Dimension	490*450*535MM



gasoline engine



动力型号	Model	HMI177F
缸径×行程	Bore×Stroke	77×58 mm
排量	Displacement	270 ml
润滑方式	Lubricating type	Splashing
额定功率	Rated power (kW/rpm)	6.5/3600
最大扭矩	Max.torque (N.m/rpm)	16 /2500
燃油消耗率	Fuel consumption	≤445g/kW.h
压缩比	Compression ratio	8.5:1
启动方式	Starting system	recoil start
点火系统	Ignition system	induction ignition
燃油容积	Fuel tank capacity	6.0 L
机油容积	Lube capacity	1.1L
动力类型	Engine type	single cylinder,4-stroke
净重	Net weight	26 kg
毛重	Gross weight	27 kg
尺寸	Dimension	490*450*535MM



动力型号	Model	HMI188F
缸径×行程	Bore×Stroke	88×64 mm
排量	Displacement	389 ml
润滑方式	Lubricating type	Splashing
额定功率	Rated power (kW/rpm)	7.5/3600
最大扭矩	Max.torque (N.m/rpm)	24 /2500
燃油消耗率	Fuel consumption	≤445g/kW.h
压缩比	Compression ratio	8.5:1
启动方式	Starting system	recoil start
点火系统	Ignition system	induction ignition
燃油容积	Fuel tank capacity	6.5 L
机油容积	Lube capacity	1.1L
动力类型	Engine type	single cylinder,4-stroke
净重	Net weight	26 kg
毛重	Gross weight	27 kg
尺寸	Dimension	490*450*535MM



动力型号	Model	HMI190F
缸径×行程	Bore×Stroke	90×66 mm
排量	Displacement	420 ml
润滑方式	Lubricating type	Splashing
额定功率	Rated power (kW/rpm)	8.5/3600
最大扭矩	Max.torque (N.m/rpm)	27 /2500
燃油消耗率	Fuel consumption	≤445g/kW.h
压缩比	Compression ratio	8.5:1
启动方式	Starting system	recoil start
点火系统	Ignition system	induction ignition
燃油容积	Fuel tank capacity	6.5 L
机油容积	Lube capacity	1.1L
动力类型	Engine type	single cylinder,4-stroke
净重	Net weight	26 kg
毛重	Gross weight	27 kg
尺寸	Dimension	490*450*535MM



gasoline engine



动力型号	Model	HMI177F
缸径×行程	Bore×Stroke	77×58 mm
排量	Displacement	270 ml
润滑方式	Lubricating type	Splashing
额定功率	Rated power (kW/rpm)	6.5/3600
最大扭矩	Max.torque (N.m/rpm)	16 /2500
燃油消耗率	Fuel consumption	≤445g/kW.h
压缩比	Compression ratio	8.5:1
启动方式	Starting system	recoil start
点火系统	Ignition system	induction ignition
燃油容积	Fuel tank capacity	6.0 L
机油容积	Lube capacity	1.1L
动力类型	Engine type	single cylinder,4-stroke
净重	Net weight	26 kg
毛重	Gross weight	27 kg
尺寸	Dimension	490*450*535MM



动力型号	Model	HMI188F
缸径×行程	Bore×Stroke	88×64 mm
排量	Displacement	389 ml
润滑方式	Lubricating type	Splashing
额定功率	Rated power (kW/rpm)	7.5/3600
最大扭矩	Max.torque (N.m/rpm)	24 /2500
燃油消耗率	Fuel consumption	≤445g/kW.h
压缩比	Compression ratio	8.5:1
启动方式	Starting system	recoil start
点火系统	Ignition system	induction ignition
燃油容积	Fuel tank capacity	6.5 L
机油容积	Lube capacity	1.1L
动力类型	Engine type	single cylinder,4-stroke
净重	Net weight	26 kg
毛重	Gross weight	27 kg
尺寸	Dimension	490*450*535MM



动力型号	Model	HMI190F
缸径×行程	Bore×Stroke	90×66 mm
排量	Displacement	420 ml
润滑方式	Lubricating type	Splashing
额定功率	Rated power (kW/rpm)	8.5/3600
最大扭矩	Max.torque (N.m/rpm)	27 /2500
燃油消耗率	Fuel consumption	≤445g/kW.h
压缩比	Compression ratio	8.5:1
启动方式	Starting system	recoil start
点火系统	Ignition system	induction ignition
燃油容积	Fuel tank capacity	6.5 L
机油容积	Lube capacity	1.1L
动力类型	Engine type	single cylinder,4-stroke
净重	Net weight	26 kg
毛重	Gross weight	27 kg
尺寸	Dimension	490*450*535MM



MAKE IDEAL POWER

GASOLINE ENGINE

NEW DESIGN



动力型号	Model	HM168FB-N
缸径×行程	Bore×Stroke	68×54 mm
排量	Displacement	196 ml
润滑方式	Lubricating type	Splashing
额定功率	Rated power (kW/rpm)	3.5/3600
最大扭矩	Max.torque (N.m/rpm)	10 /2500
燃油消耗率	Fuel consumption	≤395g/kW.h
压缩比	Compression ratio	8.5:1
启动方式	Starting system	recoil start
点火系统	Ignition system	induction ignition
燃油容积	Fuel tank capacity	3.6L
机油容积	Lube capacity	0.6L
动力类型	Engine type	single cylinder,4-stroke
净重	Net weight	15kg
毛重	Gross weight	16kg
尺寸	Dimension	410*380*400MM



动力型号	Model	HM170F-N
缸径×行程	Bore×Stroke	70×54 mm
排量	Displacement	210 ml
润滑方式	Lubricating type	Splashing
额定功率	Rated power (kW/rpm)	3.8/3600
最大扭矩	Max.torque (N.m/rpm)	10 /2500
燃油消耗率	Fuel consumption	≤395g/kW.h
压缩比	Compression ratio	8.5:1
启动方式	Starting system	recoil start
点火系统	Ignition system	induction ignition
燃油容积	Fuel tank capacity	3.6L
机油容积	Lube capacity	0.6L
动力类型	Engine type	single cylinder,4-stroke
净重	Net weight	15kg
毛重	Gross weight	16kg
尺寸	Dimension	410*380*400MM

Due to this engine have new design for filter, muffler, starter and inside structure,so this engine have lowerfuel consumption,easy start,long life,lower noise etc high performance




MAKE IDEAL POWER

168FA/168FB/170F

安装尺寸图

ASSEMBLY DIMENSION


192F/190F/188F/182F/177F/173F

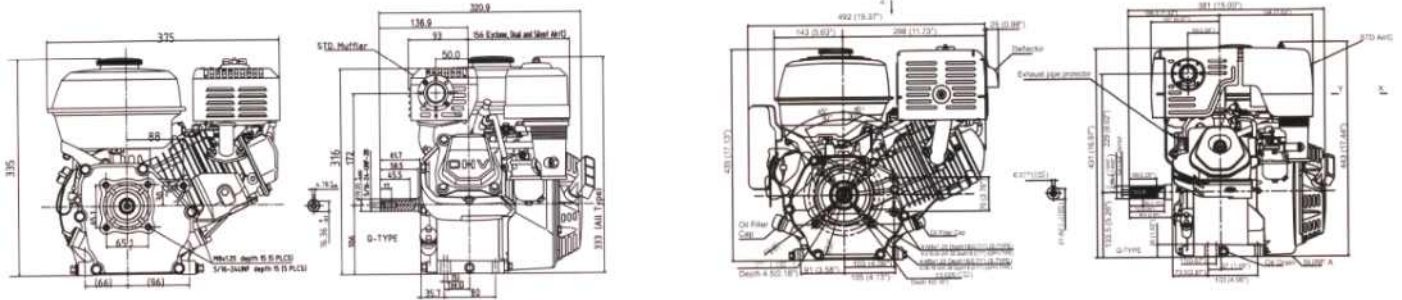

曲轴输出端类型

P.T.O SHAFT OPTIONS


168FA/168FB/170F

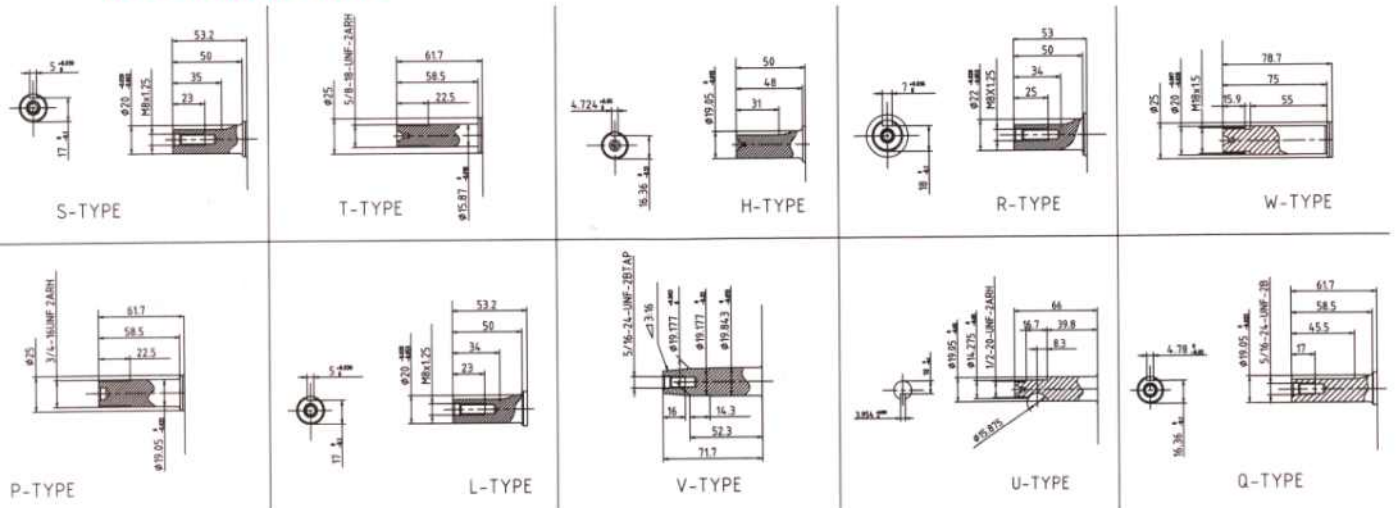

曲轴输出端类型

P.T.O SHAFT OPTIONS

192F/190F/188F/182F/177F/173F

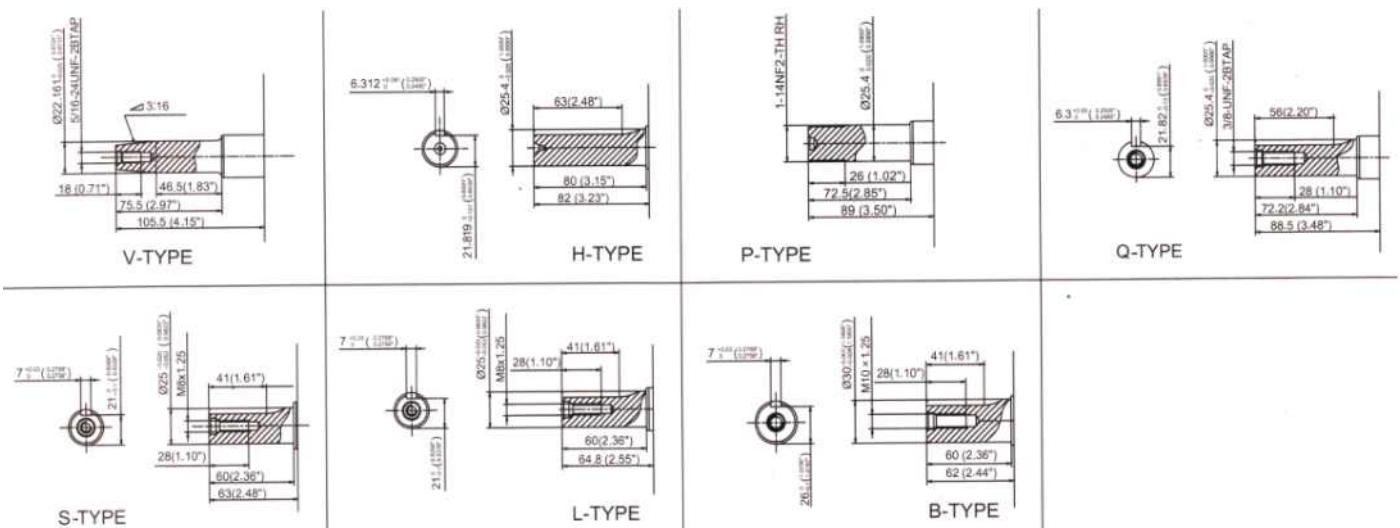



GASOLINE WATER PUMP

HMWP40

型号Model	WP40
动力型号Engine model	HM188F
额定功率Rated power kw/rpm	7.5/3600
出水口直径Output diameter	4inch
进水口直径Inlet diameter	4inch
最大扬程MAX. Lift head	21m
最大吸程MAX. Suction head	6m
最大流量MAX. Flow rate	60cbm/h
重量weight	35kgs
尺寸size:	635*450*550mm



gasoline water pump

HMWP20



型号Model	WP20
动力型号Engine model	HM170F
额定功率Rated power kw/rpm	3.8/3600
出水口直径Output diameter	2inch
进水口直径Inlet diameter	2inch
最大扬程MAX.Lift head	21m
最大吸程MAX.Suction head	6m
最大流量MAX.Flow rate	20cbm/h
重量weight	25kgs
尺寸size:	475*395*425mm

HMWP30



型号Model	WP30
动力型号Engine model	HM170F
额定功率Rated power kw/rpm	3.8/3600
出水口直径Output diameter	3inch
进水口直径Inlet diameter	3inch
最大扬程MAX.Lift head	21m
最大吸程MAX.Suction head	6m
最大流量MAX.Flow rate	35cbm/h
重量weight	26kgs
尺寸size:	520*400*465mm

HMWPC20



型号Model	WPC20
动力型号Engine model	HM170F
额定功率Rated power kw/rpm	3.8/3600
出水口直径Output diameter	2inch
进水口直径Inlet diameter	2inch
最大扬程MAX.Lift head	35m
最大吸程MAX.Suction head	6m
最大流量MAX.Flow rate	20cbm/h
重量weight	25kgs
尺寸size:	475*395*425mm



GASOLINE WATER PUMP

HMWP 15

型号Model	WP15
动力型号Engine model	HM152F
额定功率Rated power kw/rpm	1.5/3600
出水口直径Output diameter	1.5inch
进水口直径Inlet diameter	1.5inch
最大扬程MAX.Lift head	20m
最大吸程MAX.Suction head	6m
最大流量MAX.Flow rate	20cbm/h
重量weight	17kgs
尺寸size:	450*340*405mm

152F gasoline engine, 1.5inch aluminum pump, lighter weight, lower fuel consumption, especially used for family garden, villa garden



gasoline water pump



SEWAGE PUMP

HMWPS30

型号Model	WPS30
动力型号Engine model	HM170F
额定功率Rated power kw/rpm	3.8/3600
出水口直径Output diameter	3inch
进水口直径Inlet diameter	3inch
最大扬程MAX.Lift head	21m
最大吸程MAX.Suction head	6m
最大流量MAX.Flow rate	35cbm/h
重量weight	26kgs
尺寸size:	520*400*465mm



HMWPHL15

型号Model	WPHL15
动力型号Engine model	HM170F
额定功率Rated power kw/rpm	3.8/3600
出水口直径Output diameter	1/1/2inch
进水口直径Inlet diameter	3inch
最大扬程MAX.Lift head	50m
最大吸程MAX.Suction head	6m
最大流量MAX.Flow rate	20cbm/h
重量weight	26kgs
尺寸size:	520*400*465mm

HMWPC20

Chemical pump

型号Model	WPC20
动力型号Engine model	HM170F
额定功率Rated power kw/rpm	3.8/3600
出水口直径Output diameter	2inch
进水口直径Inlet diameter	2inch
最大扬程MAX.Lift head	21m
最大吸程MAX.Suction head	6m
最大流量MAX.Flow rate	20cbm/h
重量weight	25kgs
尺寸size:	475*395*425mm



special pump material design, can used for sea water, chemical liquid etc.



DIESEL WATER PUMP



SEWAGE PUMP

HMWPS30-D1

型号Model	WPS30-D1	
动力型号Engine model	Hm173 F	hm178f
额定功率Rated power kw/rpm	4.03/3600	6/3600
出水口直径Output diameter	3inch	3inch
进水口直径Inlet diameter	3inch	3inch
最大扬程MAX. Lift head	21m	21m
最大吸程MAX. Suction head	6m	6m
最大流量MAX. Flow rate	35cbm/h	35cbm/h
重量weight	26kgs	30kgs
尺寸size:	520*400*465mm	



SEWAGE PUMP

HMWPS30-D2

型号Model	WPS30-D2	
动力型号Engine model	Hm173 F	hm178f
额定功率Rated power kw/rpm	4.03/3600	6/3600
出水口直径Output diameter	3inch	3inch
进水口直径Inlet diameter	3inch	3inch
最大扬程MAX. Lift head	21m	21m
最大吸程MAX. Suction head	6m	6m
最大流量MAX. Flow rate	35cbm/h	35cbm/h
重量weight	26kgs	30kgs
尺寸size:	520*400*465mm	

HMWPHL15

型号Model	WPHL15
动力型号Engine model	HM170F
额定功率Rated power kw/rpm	3.8/3600
出水口直径Output diameter	1/1/2inch
进水口直径Inlet diameter	3inch
最大扬程MAX. Lift head	50m
最大吸程MAX. Suction head	6m
最大流量MAX. Flow rate	20cbm/h
重量weight	26kgs
尺寸size:	520*400*465mm

电动喷雾器系列 ELECTRIC SPRAYER SERIES



16L-01

- ▶ 容量Capacity: 16L
- ▶ 电池Battery: 12V 8AH/12AH
- ▶ 尺寸Size: 37 × 19 × 50cm

18L-01

- ▶ 容量Capacity: 18L
- ▶ 电池Battery: 12V 8AH/12AH
- ▶ 尺寸Size: 37 × 19 × 50cm

FOCUS ON SPRAYER FOR 20 YEARS!



GTARDENTEC



16L-02

- ▶ 容量Capacity:16L
- ▶ 电池Battery:12V 8AH/12AH
- ▶ 尺寸Size:37.5 × 19 × 50.5cm



18L-02

- ▶ 容量Capacity:18L
- ▶ 电池Battery:12V 8AH/12AH
- ▶ 尺寸Size:37.5 × 19 × 50.5cm



压力强喷雾细
high pressure and fine spray mist



16L-03

- ▶ 容量Capacity:16L
- ▶ 电池Battery:12V 8AH/12AH
- ▶ 尺寸Size:37 × 19 × 50cm



18L-03

- ▶ 容量Capacity:18L
- ▶ 电池Battery:12V 8AH/12AH
- ▶ 尺寸Size:37 × 19 × 50cm



20L-01

- ▶ 容量Capacity:20L
- ▶ 电池Battery:12V 8AH/12AH
- ▶ 尺寸Size:40.5 × 20.5 × 50cm



20L-02

- ▶ 容量Capacity:20L
- ▶ 电池Battery:12V 8AH/12AH
- ▶ 尺寸Size:40.5 × 20.5 × 50cm



18L-06

- ▶ 容量Capacity:18L
- ▶ 电池Battery:12V 8AH/12AH
- ▶ 尺寸Size:37.5 × 20 × 50.5cm



电动/手动双用
2 IN 1

20L-03

- ▶ 容量Capacity:20L
- ▶ 电池Battery:12V 8AH
- ▶ 尺寸Size:45 × 23 × 55cm

电池可拆卸
Detachable battery



电动喷雾器系列

ELECTRIC SPRAYER SERIES



16L-05

- ▶ 容量Capacity: 16L
- ▶ 电池Battery: 12V 8AH
- ▶ 尺寸Size: 34.5 × 17.5 × 48.5cm



18L-05

- ▶ 容量Capacity: 18L
- ▶ 电池Battery: 12V 8AH
- ▶ 尺寸Size: 34 × 21 × 56cm



16L-06

- ▶ 容量Capacity: 16L
- ▶ 电池Battery: 12V 8AH/12AH
- ▶ 尺寸Size: 36 × 18 × 53cm



16L-07

- ▶ 容量Capacity: 16L
- ▶ 电池Battery: 12V 8AH/12AH
- ▶ 尺寸Size: 38 × 20 × 54cm

电动喷雾器系列

ELECTRIC SPRAYER SERIES



16L-08

- ▶ 容量Capacity:16L
- ▶ 电池Battery:12V 8AH/12AH
- ▶ 尺寸Size:33 × 22 × 53.5cm



22L-01

- ▶ 容量Capacity:22L
- ▶ 电池Battery:12V 8AH/12AH
- ▶ 尺寸Size:37 × 22 × 57cm



20L-05

- ▶ 容量Capacity:20L
- ▶ 电池Battery:12V 8AH/12AH
- ▶ 尺寸Size:40.5 × 20.5 × 50cm



20L-06

- ▶ 容量Capacity:20L
- ▶ 电池Battery:12V 8AH/12AH
- ▶ 尺寸Size:41.5 × 22 × 50cm



20L-07

- ▶ 容量Capacity:20L
- ▶ 电池Battery:12V 8AH/12AH
- ▶ 尺寸Size:34 × 25 × 55cm



16L-09

- ▶ 容量Capacity:16L
- ▶ 电池Battery:12V 8AH/12AH
- ▶ 尺寸Size:33 × 22 × 50.5cm



22L-02

- ▶ 容量Capacity:22L
- ▶ 电池Battery:12V 8AH/12AH
- ▶ 尺寸Size:40 × 26.5 × 65cm



25L-01

- ▶ 容量Capacity:25L
- ▶ 电池Battery:12V 8AH/12AH
- ▶ 尺寸Size:41 × 27.5 × 72.5cm

电动喷雾器系列

ELECTRIC SPRAYER SERIES



GTARDENTEC



16L-10

- ▶ 容量Capacity: 16L
- ▶ 电池Battery: 12V 8AH
- ▶ 尺寸Size: 37 × 19 × 50cm



18L-07

- ▶ 容量Capacity: 18L
- ▶ 电池Battery: 12V 8AH
- ▶ 尺寸Size: 37 × 19 × 50cm



16L-11

- ▶ 容量Capacity: 16L
- ▶ 电池Battery: 12V 8AH/12AH
- ▶ 尺寸Size: 37 × 19 × 50cm



18L-08

- ▶ 容量Capacity: 18L
- ▶ 电池Battery: 12V 8AH/12AH
- ▶ 尺寸Size: 37 × 19 × 50cm



STARDENTEC



20L-08

- ▶ 容量Capacity:20L
- ▶ 电池Battery:12V 8AH/12AH
- ▶ 尺寸Size:40.5 × 20.5 × 50cm

电动喷雾/施肥两用器
Electric spray/Fertilizing machine



20L-09

- ▶ 容量Capacity:20L
- ▶ 电池Battery:12V 8AH/12AH
- ▶ 尺寸Size:41.5 × 26.5 × 56cm



20L-10

- ▶ 容量Capacity:20L
- ▶ 电池Battery:12V 8AH/12AH
- ▶ 尺寸Size:40.5 × 20.5 × 50cm

双核动力
Double-Core Power



20L-11

- ▶ 容量Capacity:20L
- ▶ 电池Battery:12V 8AH/12AH
- ▶ 尺寸Size:40.5 × 20.5 × 50cm

电动喷务器系列 ELECTRIC SPRAYER SERIES



GTARDENTEC



双核动力
Double-Core Power



20L-12

- ▶ 容量Capacity: 20L
- ▶ 电池Battery: 12V 8AH/12AH
- ▶ 尺寸Size: 40.5 × 20.5 × 50cm



电动/手动双用
2 IN 1



16L-12

- ▶ 容量Capacity: 16L
- ▶ 电池Battery: 12V 8AH
- ▶ 尺寸Size: 42 × 22 × 54cm



太阳能
Solar energy



16L-13

- ▶ 容量Capacity: 16L
- ▶ 电池Battery: 12V 8AH/12AH
- ▶ 尺寸Size: 41 × 26 × 48cm

自带音响/With stereo



配置 A/CONFIGURATION A

蓝牙/USB/音响
Bluetooth/USB/Stereo



配置 B/CONFIGURATION B

收音机/AUX/音响
Radio/AUX/Stereo



18L-09

- ▶ 容量Capacity:18L
- ▶ 电池Battery:12V 8AH/12AH
- ▶ 尺寸Size:37.5 × 20 × 48.5cm



20L-13

- ▶ 容量Capacity:20L
- ▶ 电池Battery:12V 8AH/12AH
- ▶ 尺寸Size:37.5 × 20 × 48.5cm



蓝牙/USB/音响/太阳能
Bluetooth/USB/Sound/Solar energy



18L-10

- ▶ 容量Capacity:18L
- ▶ 电池Battery:12V 8AH/12AH
- ▶ 尺寸Size:41 × 26 × 48cm



20L-15

- ▶ 容量Capacity:20L
- ▶ 电池Battery:12V 8AH/12AH
- ▶ 尺寸Size:41 × 26 × 48cm



GTARDENTE

手动喷雾器系列 MANUAL SPRAYER SERIES



16L-25

- ▶ 容量Capacity: 16L
- ▶ 尺寸Size: 38 × 20 × 52cm

16L-27

- ▶ 容量Capacity: 16L
- ▶ 尺寸Size: 37 × 18 × 49cm

FOCUS ON SPRAYER FOR 20 YEARS!



16L-23

- ▶ 容量Capacity:16L
- ▶ 尺寸Size:37 × 19 × 52cm



不锈钢气室
Stainless steel air chamber

16L-29

- ▶ 容量Capacity:16L
- ▶ 尺寸Size:37 × 19 × 50cm



16L-28

- ▶ 容量Capacity:16L
- ▶ 尺寸Size:37 × 19 × 52cm



16L-26

- ▶ 容量Capacity:16L
- ▶ 尺寸Size:38 × 20 × 52cm



压力强喷雾细
High pressure and fine spray mist



GTARDENTEC

page:12

电动施肥器

ELECTRIC FERTILIZER DEVICE



FD-01

- ▶ 容量Capacity:25L
- ▶ 尺寸Size:47 × 28 × 48cm



20L-16

- ▶ 容量Capacity:20L
- ▶ 尺寸Size:38X20.5X52.5



16L-30

- ▶ 容量Capacity:16L
- ▶ 尺寸Size:42 × 22 × 57cm



16L-31

- ▶ 容量Capacity:16L
- ▶ 尺寸Size:42 × 20.5 × 53.5cm



型号 Model	SY-3L-01	SY-5L-01	SY-6L-01	SY-8L-01	SY-10L-01
容量 Capacity	3L	5L	6L	8L	10L
尺寸 Carton Size	56 × 38 × 36cm	53 × 38 × 45cm	56 × 38 × 53cm	56 × 38 × 57cm	56 × 38 × 64cm




型号 Model	SY-3L-02	SY-5L-02	SY-6L-02	SY-8L-02	SY-10L-02
容量 Capacity	3L	5L	6L	8L	10L
尺寸 Carton Size	56 × 38 × 36cm	53 × 38 × 45cm	56 × 38 × 53cm	56 × 38 × 57cm	56 × 38 × 64cm



气压式喷雾器

GARDEN PRESSURE SPRAY

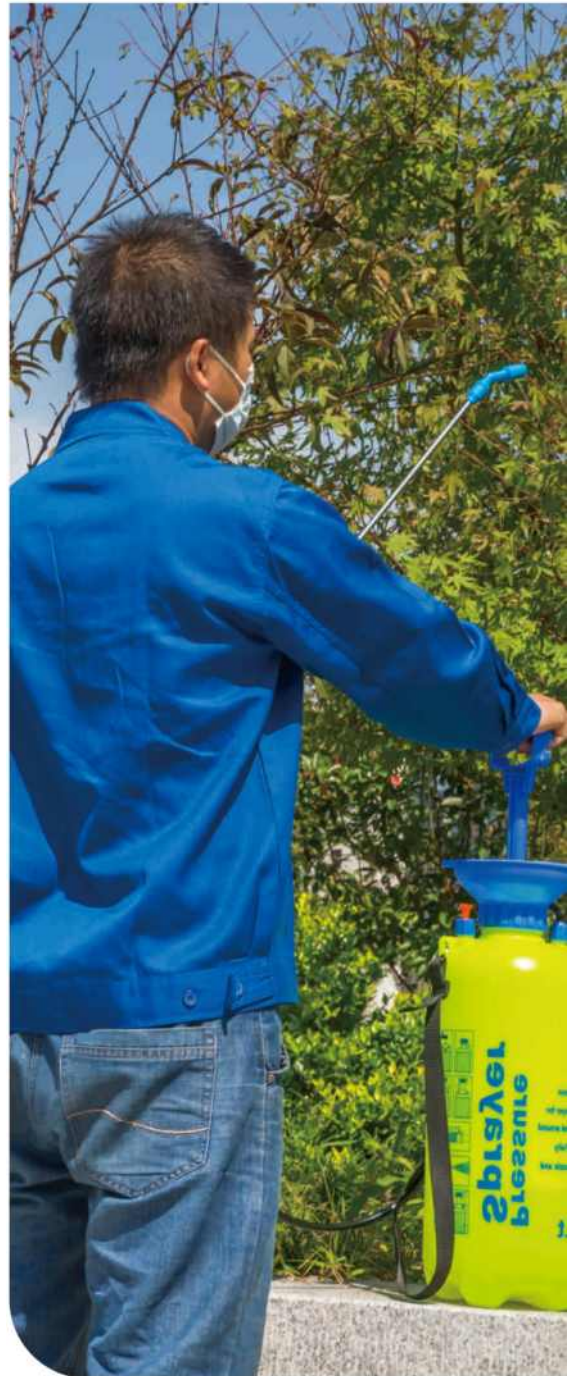

配件系列 ACCESSORIES SERIES



SYA-001



SYA-002



SYA-003 230cm



SYA-004



SYA-005



SYA-006



SYA-007



SYA-008



SYA-009
Three nozzle spraying gun



SYA-010
Two nozzle spraying gun



SYA-011 60cm/90cm straight head gun



SYA-012 60cm/90cm bend head gun



SYA-013 60cm/90cm bend type anti-wind gun



SYA-014 60cm/90cm axial gun



SYA-015 60cm/90cm straight head anti-wind gun



SYA-016 90cm straight through universal gun



SYA-017 90cm long-range gun



SYA-018 35cm direct type gun



SYA-019 Five nozzle spraying gun



SYA-020 Three nozzle spraying gun



型号 Model	外径 Outer diameter(mm)	内径 Inner Diameter(mm)	长度 Length(m)	工作压力 Work pressur(kgf/cm ²)	爆破压力 Max pressure(kgf/cm ²)
Three layers	13	7.5	30-100	65	180
Three layers	14	8.5	30-100	60	160
Three layers	16	10	30-100	50	120
Three layers	19	13	30-100	40	100
Two layers	13	7.5	30-100	50	140
Two layers	14	8.5	30-100	50	140
Two layers	16	10	30-100	40	120
Two layers	19	13	30-100	35	100

ACCESSORIES SERIES



SYC-001



SYC-002



SYC-003



SYC-004



SYC-005



SYC-006



SYC-007



SYC-008



SYC-009



SYC-010



SYC-011



SYC-012



SYC-013



SYC-014



SYC-015



SYC-016



SYC-017



SYC-018



SYC-019



SYC-020



SYC-021



SYC-022



SYC-023



SYC-024



SYC-025



YD-001



SYD-002



SYD-003



SYD-004



SYD-005



SYD-030



SYD-006



SYD-007



SYD-008



SYD-009



SYD-015



SYD-016



SYD-010



SYD-031



SYD-032



SYD-033



SYD-034



SYD-024



SYD-025



SYD-026



SYD-027



SYD-028



SYD-029



SYD-011



SYD-012



SYD-013



SYD-014



SYD-015



SYD-016



SYD-017



SYD-018



SYD-019



SYD-020



SYD-021



SYD-022



SYD-023



SYE-001



SYE-002



SYE-003



SYE-004



SYE-005



SYE-006



SYE-007



SYE-008



SYE-009



SYE-010



SYE-011



SYE-012



SYE-013



SYE-014



SYE-015



SYE-016



SYE-017



SYE-018



SYE-019



SYE-020

